

NP100

100 products in 18 months

▶ **PLUG & PLAY**



PicoKom

POWER SUPPLY UNIT

THE BEST SIGNAL, THE PERFECT SIZE FOR THE HOME ENVIRONMENT



PICOKOM SERIES


The new PicoKom series, composed of two Power Supply Units (PSU's) and one domestic amplifier, is one step further on the design and manufacturing of domestic products.

- **REF. 5795** is a Power Supply Unit (PSU) with two outputs. You could connect one output directly to one TV set and the other to a distribution network.
- **REF. 5796** is the Power Supply Unit (PSU) that guarantees the correct powering in a terrestrial + satellite single-cable installation.

REF	DESCRIPTION	EAN 13 CODE
5795	PicoKom 24V/130mA PSU	8424450140925
5796	PicoKom 12V/220mA PSU	8424450140949

- ✓ Reduced dimensions (90x67x28mm) to fit in any junction box
- ✓ High efficiency switch mode power supply
- ✓ Low consumption

FULLY AUTOMATED PRODUCTION INTEGRATING THE NEW GENERATION OF MICROCOMPONENTS
 DESIGNED WITH THE NEW GENERATION OF MICROCOMPONENTS, THE PICOKOM PRODUCTS STAND OUT FOR THEIR SMALL SIZE AND THEIR
 LOW CONSUMPTION

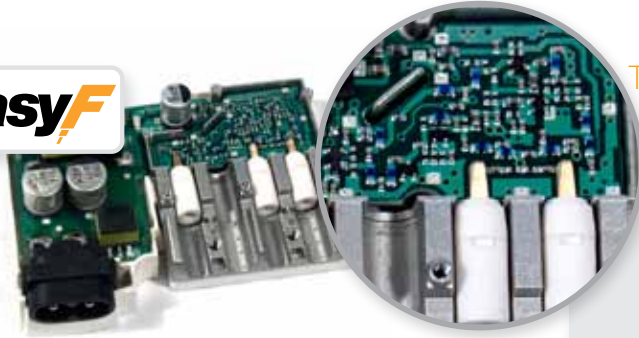

TYPICAL APPLICATIONS

TECHNICAL SPECIFICATIONS

Ref. 5796

Frequency range	MHz	5-2500
Through losses VHF/UHF - SAT (IF)	dB	1 typ - 1,5 typ
Mains voltage	V _{AC}	196-264
Mains frequency	Hz	50/60
Output voltage	V _{DC}	12
Maximum output current	mA	220

THE PSU THAT GUARANTEES THE MAST AMPLIFIER AND THE LNB RIGHT POWERING IN A TERRESTRIAL + SATELLITE SINGLE-CABLE INSTALLATION

Ref. 5795

Frequency range	MHz	5-862
Through losses. 1 output used	dB	1,5 typ
Through losses. 2 output used	dB	4 typ
Mains voltage	V _{AC}	196-264
Mains frequency	Hz	50/60
Output voltage	V _{DC}	24
Maximum output current	mA	130

ONE HOUSING, ONE REFERENCE, ONE PRODUCT BUT THE FUNCTION-ALLITY OF TWO:

- ✓ 1 OUTPUT (1,5 dB THROUGH LOSSES) PSU
- ✓ 2 OUTPUTS (4 dB THROUGH LOSSES) PSU

