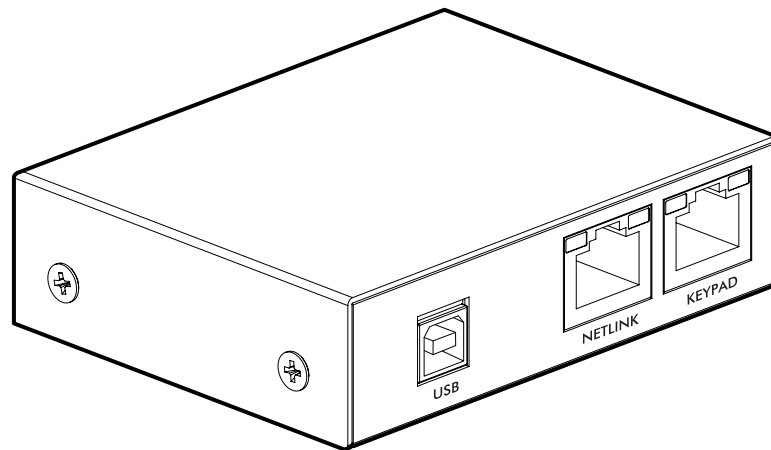


Specification Data Sheet

Rev 1.0 October 2017

Armour Home Electronics R&D Department



DigiLink works exclusively with the Systemline 7 NetLink audio player, as its main purpose is to provide NetLink with a dedicated digital audio connection from the server using a cat5/6 data cable. When DigiLink is used, the audio is no longer streamed over the Local Area Network, which is now used for control and web configuration only. DigiLink connects to the server via a USB cable, and so must be installed near to the server. NetLink can be up to 50 m away. KPS11 keypads can still be used with the NetLink zone but must be wired to the DigiLink unit.

DigiLink is highly recommended with NetLink when installing a home cinema or an audiophile listening zone, to eliminate any continuous data on the network.

Features

Digital Audio Input	1 x USB - Type B	2.0
Keypad Output	1 x RJ45 (T568B)	50 m Max
NetLink Output	1 x RJ45 (T568B)	50 m Max

Voltage

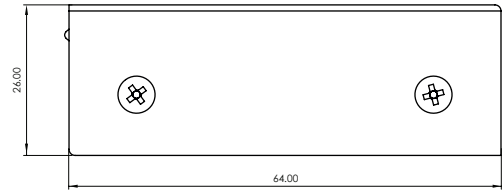
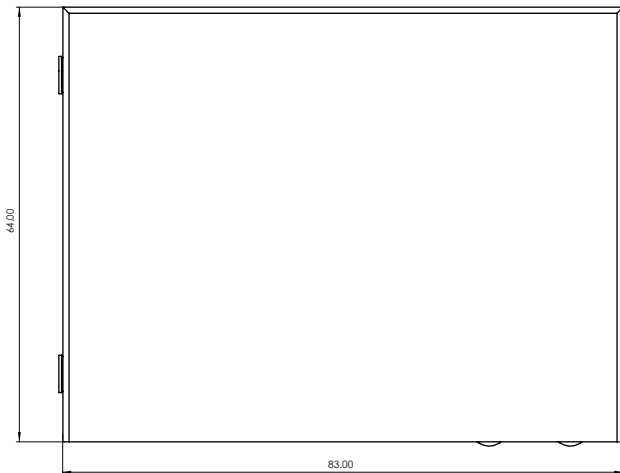
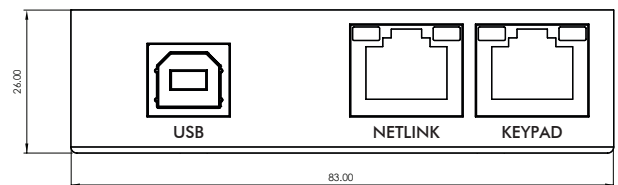
Power	Supplied by NetLink (RJ45)	12 V 150 mA
-------	----------------------------	-------------

Audio

Frequency response	20 Hz - 96 kHz \pm 0.1 dB	
Jitter	@ 96 kHz sample rate	30 ps
Digital Input Widths Supported	16 / 24 / 32bit	
Sample Rates Supported	44.1, 48, 96, 192 kHz	

General

Dimensions	Height: 26 mm, Width: 83 mm, Depth: 64 mm	
Net Weight	143g	

FRONT**SIDE****TOP****REAR**

*All measurements in mm