


TMS 5x16 C EB

Art. Number 318628

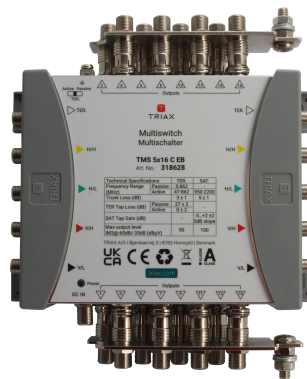

Cascade multiswitch for 1 Satellite position with 5 inputs and 5 trunk outputs, suitable for distributing satellite and terrestrial signals in small to large sized systems. Available with 16 subscriber outputs and powered by the TMS PSU external power supply either directly or via the SAT trunk lines.

Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches.

The TMS 5x16 C EB offers excellent performance and flexibility, with a compact design for installations even in confined spaces.

Excellent performance

- Low insertion loss
- High isolation
- Low power consumption
- RED compliant
- ESD Protection

Flexibility

All the functionality you need in a simplified, streamlined range:

- Easier to select the right product
- Fewer products to stock
- Active/Passive Terrestrial Switch

Convenience

Designed with installer convenience in mind:

- Equidistant F-connectors on all multiswitches
- Colour-coded input labels
- LED power indicator
- Flexible power injection
- Earth bars

Technical Specifications

ORDER INFORMATION

EAN Number 5702663186286

CHARACTERISTICS

LNB current max. | mA 3000 mA
 LNB type Quattro
 Max. input level - SAT (IMD3 - 35dB) | dBμV 98 dBμV
 Max. input level - TER (IMD3 - 60dB) | dBμV 90 dBμV
 Max. output level SAT @ -35 dB IMD3 | dBμV 100 dBμV
 Max. output level TER @ -60dB IMD3 | dBμV 90 dBμV
 Switch commands DiSEqC 1.0/2.0, 13/18V, 0/22kHz

FREQUENCY RANGE

Frequency range SAT | MHz 950...2200 MHz
 Frequency range TER | MHz Active: 47...862 / Passive: 5...862 MHz

GAIN

Gain - SAT (with 5 dB slope) | dB $-3...+2 \pm 2$ dB
 Gain - TER | dB 0 ± 2 dB

LOSS

Insertion loss - trunkline SAT | dB 4 ± 1 dB
 Insertion loss - trunkline TER | dB 4 ± 1 dB
 Tap loss TER | dB 27 ± 2 dB

ISOLATION

Isolation cross polarisation H/V | dB 30 dB
 Isolation out-out SAT | dB 30 dB
 Isolation out-out TER | dB 25 dB
 Isolation SAT to TER | dB > 30 dB
 Isolation trunk to trunk | dB > 30 dB

RETURN LOSS

Return loss SAT inputs | dB >10 dB
 Return loss SAT outputs | dB >10 dB
 Return loss TAP outputs | dB 10 dB
 Return loss TER inputs | dB >10 dB
 Return loss TER outputs | dB >10 dB

ELECTRICAL

Impedance | Ω 75 Ω

OPERATIONAL

Control LEDs Green LED (Power)
 DC Current consumption | mA 30mA TER passive mA
 200mA TER active
 ESD protection 4KV inputs & sub outputs

Technical Specifications

PSU/adapter Art number	318165, 318166, 318167
LINE power current (max.) mA	2000 mA
LINE power DC voltage (max.) VDC	15...20 VDC
Max. current to each output (supplied by set top box) mA	<50 mA
PSU output DC voltage VDC	18 VDC
Temperature - operating °C	-20...+55 °C

CONNECTORS

Connector Type	F-female
Connector DC	F-female
Colorcoding @IF/TER inputs	VL=Black, VH=Red, HL=Green, HH=Yellow, White=TER
Number of inputs	17
Number of trunk inputs	4 SAT, 1 TER
Number of trunk outputs	4 SAT, 1 TER
Subscriber outputs	16

MECHANICAL

Product Depth mm	65 mm
Packaging Depth m	0.182 m
Packaging Height m	0.070 m
Total Weight kg	1.035 kg
Packaging Width m	0.230 m
Product Height mm	200 mm
Main material	Steel housing
Net Weight kg	0.895 kg
Packing QTY	1
Remarks	Earth bars
Tara Weight kg	0.140 kg
Packaging Volume m3	0.000 m3
Product Width mm	140 mm