


SWI8504 DSCR UK

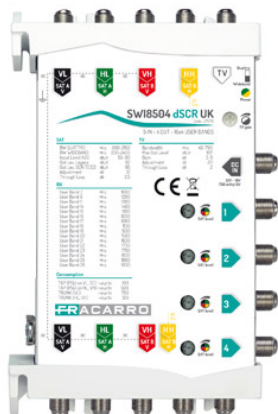

Cascadable 5-input SCD2 (dCSS) multiswitches, CAGC and 4 taps with 16 frequencies each, powered entirely by decoder.

SWI8504 DSCR UK		
Code	271178	
Inputs	4 SAT, 1 TV	
Taps	4 to serve up to 4 Legacy users, 16 SCR users or 64 SCD2 (dCSS) users	
SAT		
Bandwidth	MHz	HVHV: 950-2150; Wideband 250-2400
AGC	dB μ V	55-90
Max output level (per mux)	dB μ V	Legacy: 92, SCR/SCD2 (dCSS): 95
Gain adjustment	dB	12
Insertion loss	dB	-2.5
SAT-SAT Isolation	dB	>25
TV		
Bandwidth	MHz	40-790
Gain	dB	3-5
Max output level (-35dBc 2 tone)	dB μ V	107
Gain adjustment	dB	20
Insertion loss	dB	-2
Tap		
Bandwidth SAT	MHz	950-2150

Bandwidth TV	MHz	40-790
SCR Frequencies	MHz	980, 1030, 1080, 1130 MHz, 1280, 1380, 1480, 1530 MHz, 1580, 1630, 1680, 1730 MHz, 1780, 1830, 1880, 1930 MHz, (responding to SKY UK commands)

Consumption

Tap consumption	mA@13V	PSU su DC-IN o VL: 100; PSU su HL o VH: 420
Current consumption	mA@13V	PSU su DC-IN o VL: 750; PSU su HL o VH: 120; HH pass
Power supply	V	12-18

Features

Dimensions	mm	180x109x31
Operating temperature	°C	-10÷+55