

Compact Msw 9 IN A/P TV

SWP908TS SWP912TS

SWP916TS SWP924TS

SWP932TS



The **SWP9xxTS Serie** belongs to the **compact** multiswitch range with **9 inputs** (8 satellite polarities and TV); it was designed to fulfil every installation requirement in small and medium distribution systems.

The product ensures high quality in a **compact size**, its inputs are distinguished by different **colours** to make the cable connection faster and easier.


The serie is composed by 5 products: **9 inputs with 8, 12, 16, 24 and 32 output taps**; each port has a **LED** which shows the correct reception of the STB DiSEqC command.

The product can be used with **SWA930TS** amplifier, which allows to adjust appropriately the satellite and TV gains.

Characteristics


- **Dip switch** to select TV gain active and passive
- **Return channel** included when TV gain is passive
- Satellite bandwidth up to **2300MHz**
- **High output level**
- **Standalone power supply** for easier installation; it provides the required voltage to the LNB
- Easy to install thanks to **standard colour coding**
- **Low cost**
- **Compact size**


		SWP908TS	SWP912TS	SWP916TS	SWP924TS	SWP932TS
Fracarro Code		287350	287351	287352	287353	287354
Inputs		9				
Outputs		8	12	16	24	32
Satellite						
Bandwidth	MHz	950 - 2300				
Gain	dB	2	1	1	-1	-2
Uptilt	dB	4				
Max Output Level (IM3)	dB μ V	100				
Return Loss	dB	10				
Terrestrial						
Bandwidth	MHz	50 - 862				
Gain Active	dB	1	0	-1	-2	-4
Gain Passive	dB	-19	-20	-21	-22	-24
Max Output Level (IM3)	dB μ V	95				
Return Loss	dB	10				
General Parameters						
Isolation SAT/SAT TV/SAT	dB	30				
Standard	V, KHz	14/18 0/22 - DiSEqC 2.0				
Tap Consumption	mA	50				
DC Plug	mm	2.1x5.5x12				
	pol	internal positive, external negative				
Max current to LNB	mA	1500				
Dimensions	mm	110x190x40	170x190x40	170x190x40	230x190x40	300x190x40
Operating Temperature	$^{\circ}$ C	-20 \div 60				


PSU1315TS		
Fracarro Code		287375
Output Voltage	V	13
Output Current	mA	1500
Main Voltage	V, Hz	120-240, 50-60
Isolation	Classe	II
DC Plug	mm	2.1x5.5x12
	pol	 internal positive, external negative
Dimensions	mm	90 x 70 x 45
Operating Temperature	$^{\circ}$ C	0 \div 40

Code	Item	Packaging	Quantity	Dimensions	Net Weight	Weight
			pcs	mm	kg	kg
287350	SWP908TS	Single	1	255x245x55	0.8	0.8
287351	SWP912TS	Single	1	330x245x55	1.1	1.1
287352	SWP916TS	Single	1	330x245x55	1.1	1.1
287353	SWP924TS	Single	1	390x255x50	1.2	1.2
287354	SWP932TS	Single	1	390x255x50	1.4	1.4
287375	PSU1315TS	Single	1	100x50x70	0.16	0.16

Installation Example

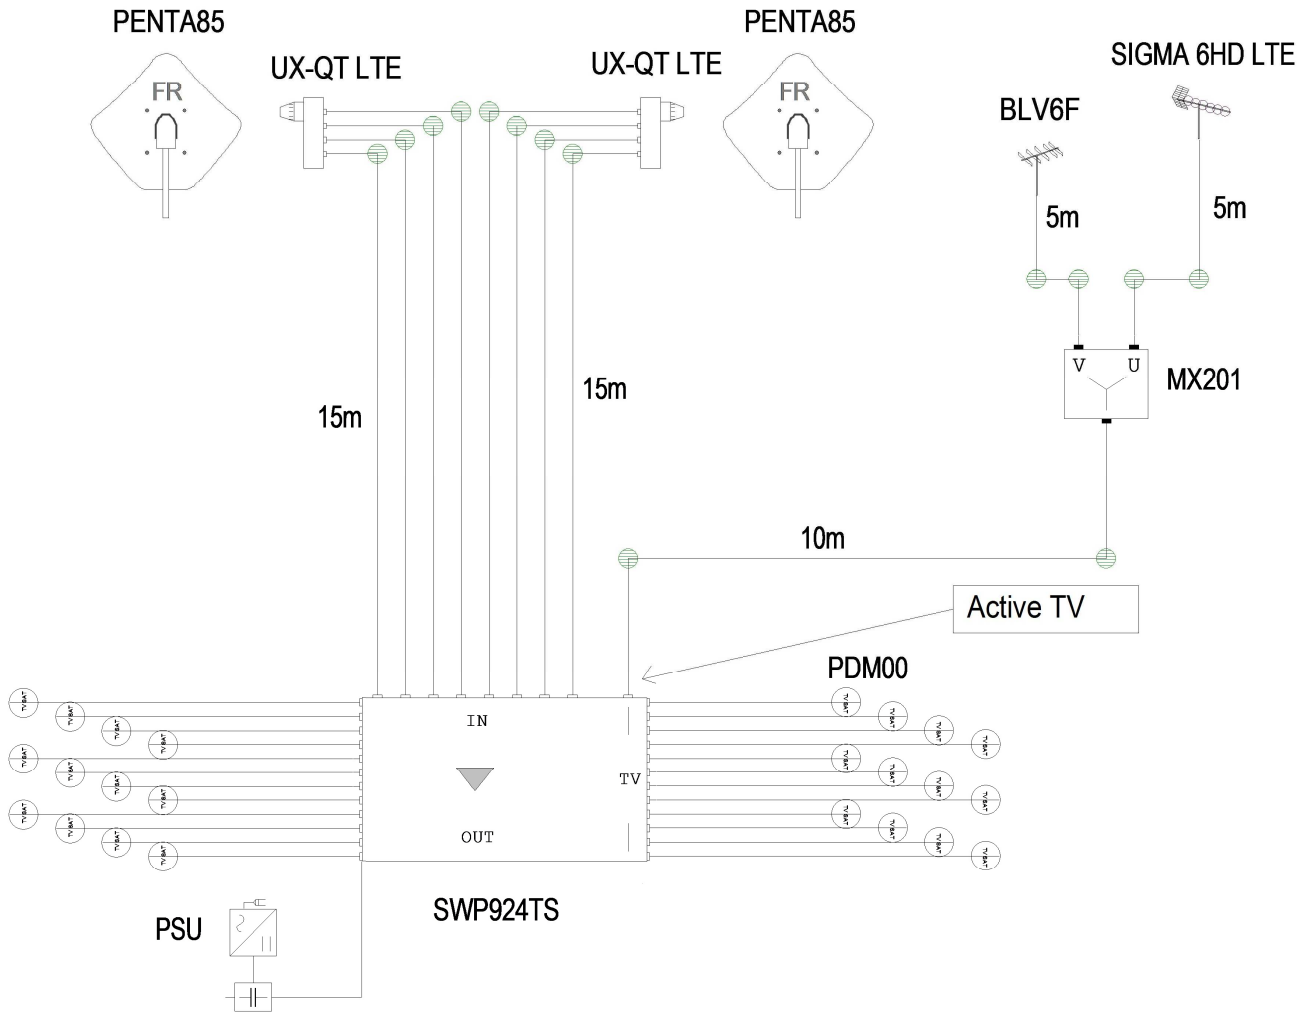


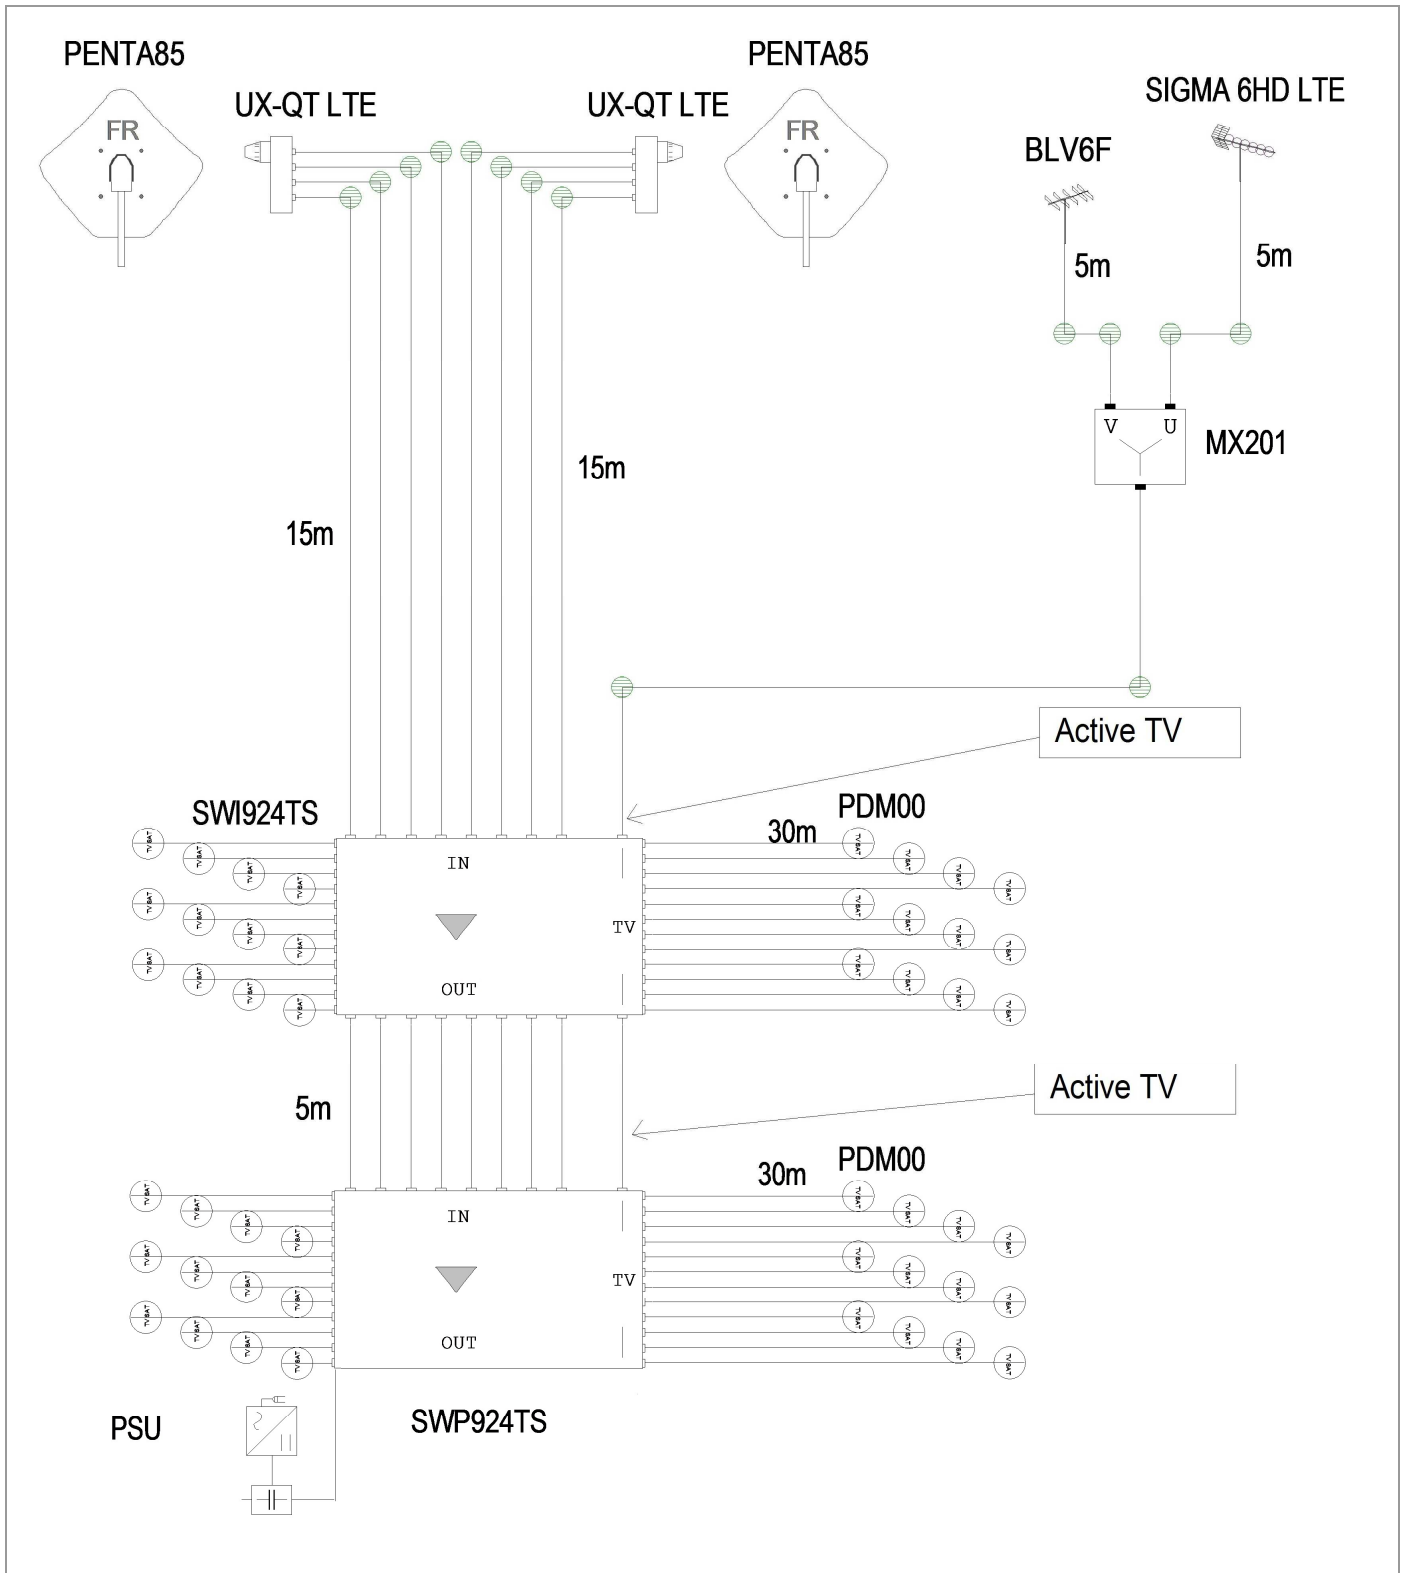

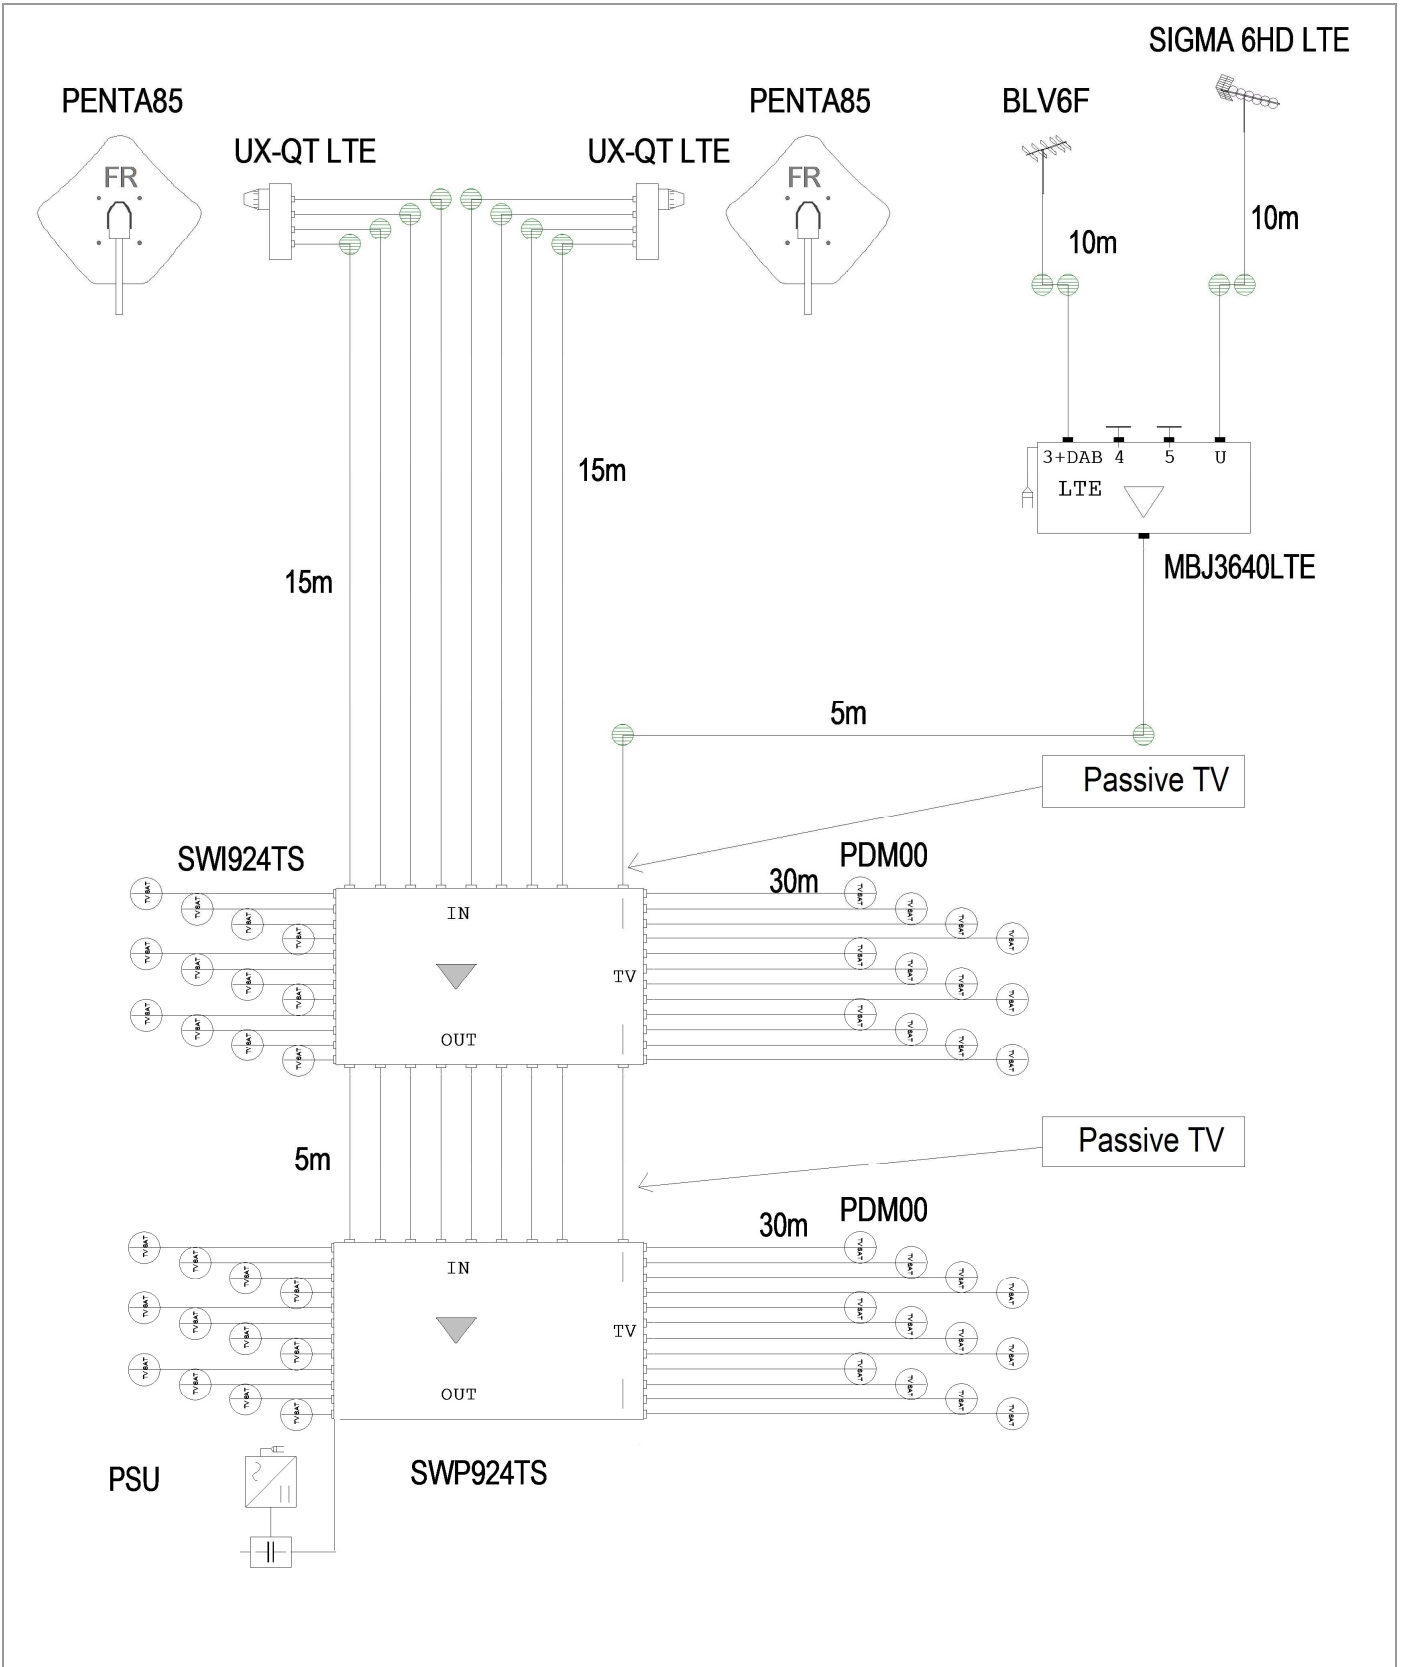


PENTA85

PENTA85



UX-QT LTE

UX-QT LTE



SIGMA 6HD LTE

BLV6F



10m



10m




MBJ3640LTE

15m

15m

5m



SWA930TS



Passive TV

Passive TV



SWI924TS



30m PDM00

Passive TV



SWI924TS



30m PDM00


Passive TV

5m



30m PDM00

PSU



SWP924TS