


Data sheet

Taps and Splitters

HTS 6DC - 6 way splitter

Item number 347016

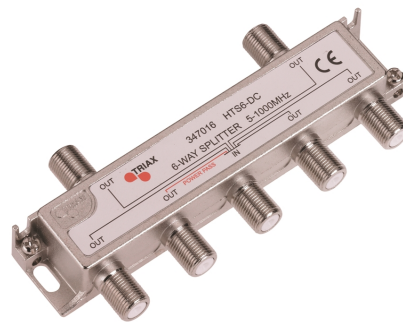

Specifications

EAN Number	5702663470163
Frequency range	5-1000 MHz
Number of outputs	6
Insertion loss (in-out) 5-40 MHz	< 8.5 dB
Insertion loss (in-out) 40-470 MHz	< 9.0 dB
Insertion loss (in-out) 470-860 MHz	< 10.0 dB
Insertion loss (in-out) 860-1000 MHz	< 10.5 dB
Isolation (tap-tap) 5-40 MHz	> 26.0 dB
Isolation (tap-tap) 40-470 MHz	> 28.0 dB
Isolation (tap-tap) 470-860 MHz	> 24.0 dB
Isolation (tap-tap) 860-1000 MHz	> 24.0 dB
Return loss (in-out) 5-40 MHz	> 22.0 / > 20.0 dB
Return loss (in-out) 40-470 MHz	> 20.0 / > 20.0 dB
Return loss (in-out) 470-860 MHz	> 20.0 / > 20.0 dB
Return loss (in-out) 860-1000 MHz	> 20.0 / > 20.0 dB
Shielding efficiency VHF/UHF	> 110.0 dB
DC Passthrough	Yes
Connector Type	F-female
Impedance	75 Ω
Certification	CE
Height (mm)	60 mm
Depth (mm)	16 mm
Width (mm)	117 mm
Weight (kg)	0,13 kg
Packing QTY	1

Specifications

Packaging Depth	0,120 m
Packaging Height	0,020 m
Total Weight	0,051 kg
Packaging Width	0,050 m
Packaging Volume	0,000 m ³
Net Weight	0,045 kg
Tara Weight	0,006 kg