

Technical Document

N-Type Crimp Plug for WEB400

webro

Part Number: 55-N-C-J400-2

Description: N-Type Crimp Plug for WEB400

Product Construction

Shell/Body	:	Nickel Plated Brass
Pin	:	Gold Plated Brass
Insulator	:	PTFE
Ferrule	:	Nickel Plated Brass

Electrical Characteristics

Impedance	:	50 Ω
Max. Frequency Range	:	3 GHz, DC
Dielectric Withstanding Voltage	:	2500 V RMS
Contact Resistance	Centre :	1m Ω
	Outer :	1m Ω
Insulation Resistance	:	5000m Ω

Mechanical Characteristics

Mating	:	5/8"-24UNEF-2B
Durability	:	500 cycles

Environmental Characteristics



Temperature Range	:	-55°C to +155°C
-------------------	---	-----------------

Certifications & Standards

RoHS 3 Compliant	:	Yes
------------------	---	-----

Assembly

Pin	:	3.25mm hex
Ferrule	:	10.9mm hex
Suitable Ratchet Tool	:	Webro Part No. 55-901-0043-115

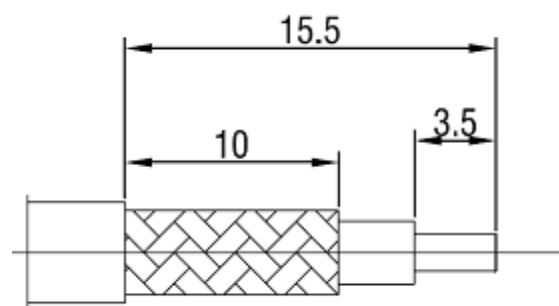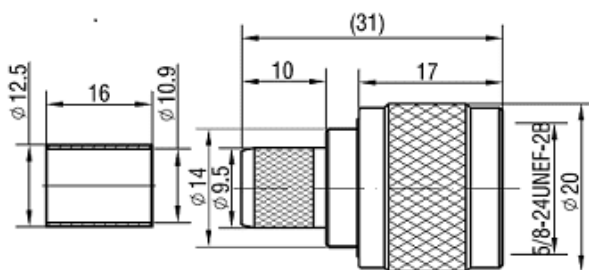

All drawing sizes in mm

Publication Date: 02/02/2023

Revision Number: 2.0

Written by: GB

Authorised by: GB