

75SERIES

Distribution Amplifiers · 2 & 4 Output

SPECIFICATION

Product Range:	DA220	DA240
No. of Inputs	2	2
No. of Outputs	2	4
Frequency range	85-240/470-860MHz (Class 0)	
Gain	8dB	
Noise Max	<3dB	
Max. Output	78dB	
Isolation Between Ports	>20dB	
Return path Frequency	5-30MHz	
Impedance	75	
Mains power	230V AC ±10% 50Hz	

Product Range:	DA220/48	DA240/48
No. of Inputs	2	2
No. of Outputs	2	4
Frequency range	85-240/470-694MHz (Class 1)	
Gain	8dB	
Noise Max	<3dB	
Max. Output	78dB	
Isolation Between Ports	>20dB	
Return path Frequency	5-30MHz	
Impedance	75	
Mains power	230V AC ±10% 50Hz	

Fitted Mains Plug BS1363 3A rating



Domestic indoor amplifier range for television and radio signal distribution for 2 or 4 outputs. Fully screened with F-Type connections and DC pass allowing for control of a SKY HD box via RemoteLink magic eyes.



SATELLITE & TERRESTRIAL



DISTRIBUTES SIGNAL



AMPLIFIES SIGNAL



RED CLASS 0 & 1



LOW NOISE



FULLY SCREENED



IR REMOTE COMPATIBLE



SKY HD COMPATIBLE



FOR COAX CABLE



F-TYPE CONNECTION



REQUIRES POWER



POWER ON INDICATOR



BOX CARTON

SCAN FOR INFO



*RED: Radio Equipment Directive 2014/53/EU

75SERIES


Distribution Amplifiers · 6 & 8 Output

SPECIFICATION

Product Range:	DA260	DA280
No. of Inputs	2	2
No. of Outputs	6	8
Frequency range	85-240/470-860MHz (Class 0)	
Gain	8dB	
Noise Max	<3dB	
Max. Output	78dB	
Isolation Between Ports	>20dB	
Return path Frequency	5-30MHz	
Impedance	75	
Mains power	230V AC ± 10% 50Hz	

Product Range:	DA260/48	DA280/48
No. of Inputs	2	2
No. of Outputs	6	8
Frequency range	85-240/470-694MHz (Class 1)	
Gain	8dB	
Noise Max	<3dB	
Max. Output	78dB	
Isolation Between Ports	>20dB	
Return path Frequency	5-30MHz	
Impedance	75	
Mains power	230V AC ± 10% 50Hz	

Fitted Mains Plug BS1363 3A rating

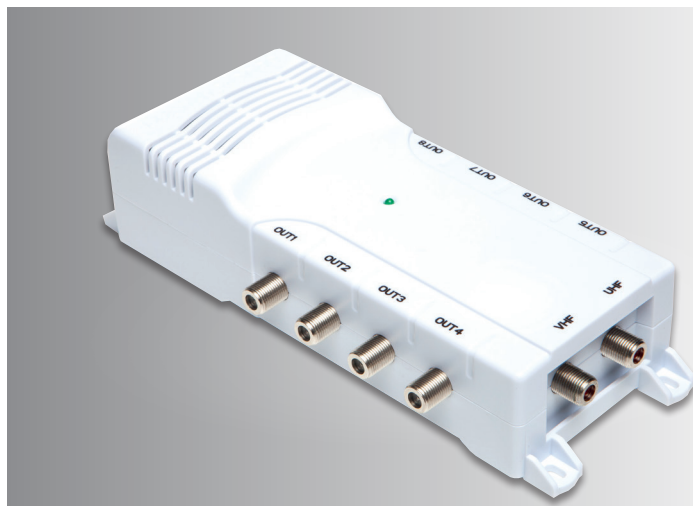

Fully screened indoor domestic distribution amplifiers for up to 6 or 8 TV sets with F-Type connections. DC pass for SKY distribution and compatible with RemoteLink magic eyes.



TERRESTRIAL SIGNAL



DISTRIBUTES SIGNAL



AMPLIFIES SIGNAL



RED CLASS 0 & 1



LOW NOISE



FULLY SCREENED



IR REMOTE COMPATIBLE



SKY HD COMPATIBLE



FOR COAX CABLE



F-TYPE CONNECTION



REQUIRES POWER



POWER ON INDICATOR



BOX CARTON

SCAN FOR INFO

