

27 inches IT Monitor

MW-LC27-B



Features

- Resolution is up to at 1920 x 1080.
- Refresh rate up to 75Hz.
- 178° horizontal and vertical viewing angle.
- Screen can reduce blue light, protect eyes.
- Plastic body, ultra-narrow bezel, light weight and elegant.
- Shielding cover design, effectively preventing electromagnetic radiation.
- Stable structure design, highly durable.
- Automatically detect if the signal is connected successful.
- Support multiple language.


Specifications


Model	MW-LC27-B
Panel	
Backlight	LED
Panel Size	27"
Pixel Pitch (H x V) (mm)	0.31 x 0.31
Resolution	1920 × 1080

Color Support	16.7 M
Brightness (cd/m ²)	250
Contrast Ratio	4000:1
Refresh Rate	75 Hz
Response Time (ms)	14
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Display Size (mm)	596.7 x 335.7
Operation Hour	18/7
Bezel Width	2.8mm (top/left/right), 17.2 mm (bottom)
Color Gamut	72% NTSC
Surface Treatment	Haze 25%, 3H
LCD Technology/Panel Type	VA
Interface	
Video Input	1 x HDMI(1920 x 1080@75 Hz), 1 x VGA(1920 x 1080@60 Hz)
VESA	
VESA (mm)	100 x 100
Wall-mounted Thread	4-M4 Threaded Hole, 8mm Deep Thread
OSD	
Multi-Language	Chinese, English, Korean, Polish, French, German, Italian, Spanish, Portuguese, Japanese, Dutch
General	
Input Voltage	DC 12 V, 2.5 A
Typical Power Consumption (W)	≤28
Standby Power Consumption (W)	≤0.5
Package Dimensions (W x H x D) (mm)	673 x 432 x 112
Weight (Kg)	Net Weight: 3.6 Gross Weight: 4.8
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 85% (No Condensation)
Storage Temperature	-20°C ~ 60°C
Storage Humidity	5% ~ 90% (No Condensation)


Standard	1 x HDMI Cable, 1 x Quick Guide, 1 x Pedestal, 1 x Adapter
Material	Plastic
Lifetime (h)	30000
Certifications	CE/FCC
MTBF	50000 h

Dimensions

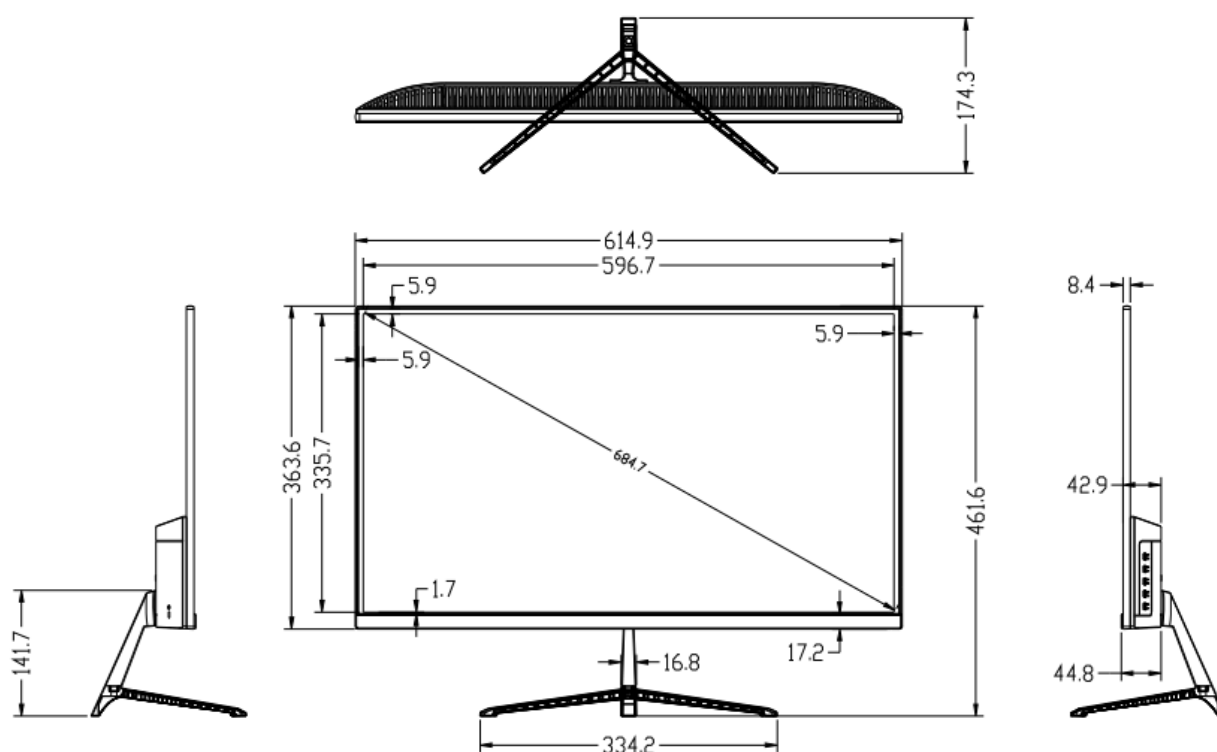

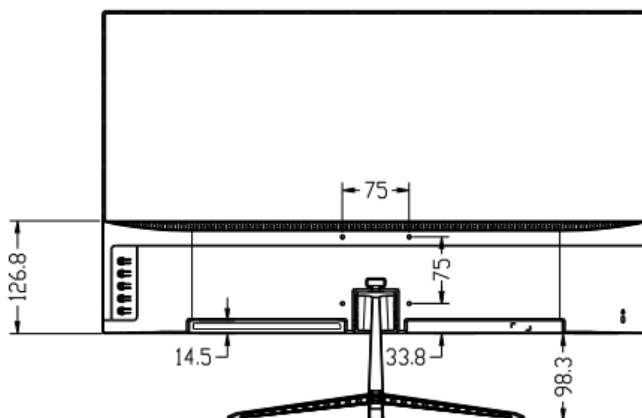

Interface

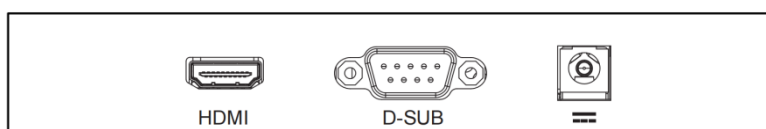

Ordering Info

Product Model	Description
MW-LC27-B	27 inches IT Monitor