


DS-KH9510-WTE1

Video Intercom Network Indoor Station

HIKVISION

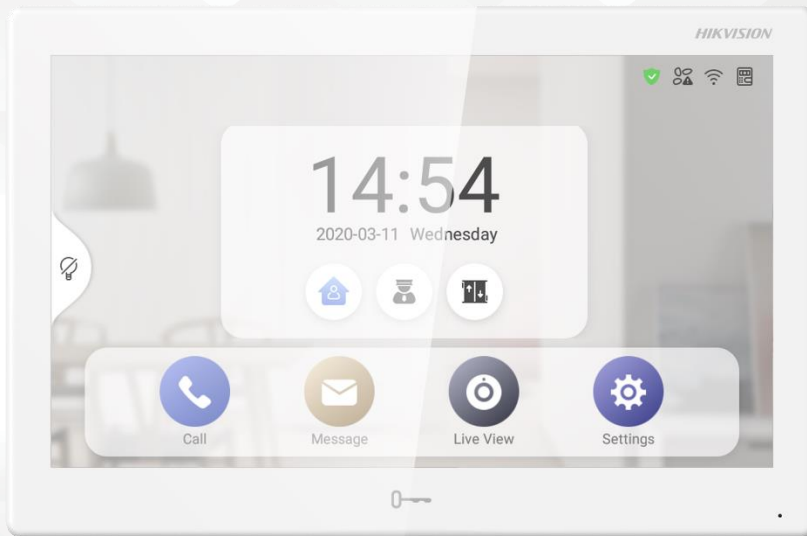

Key Feature

- 10.1-inch colorful touch screen with resolution 1024 × 600
- UI V2.0: User friendly design
- Plug & play
- Standard PoE
- Easy installation
- Supports link to hikvision devices to bulid a management center
- Receives video call and unlocks on mobile App anytime, anywhere


Specification

System parameters	
Memory	1 GB
Flash	8 GB Emmc
Display parameters	
Display screen	10.1-inch colorful IPS touch screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Brightness	Adjustable
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression standard	G.711 U, G.711 A
Audio quality	Noise suppression and echo cancellation
Network parameters	
Wired network	10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Network protocol	TCP/IP, SIP, RTSP
Interfaces	
Network port	RJ45
RS-485	1
Alarm in	8
Button	1
TAMPER	1
Alarm out	2 relay
Debugging port	1
Micro USB	For debug only
General	
Power supply	12 VDC & standard PoE IEEE 802.3af
Power consumption	≤ 8 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimensions	254 mm × 166 mm × 26.65 mm (10.0" × 6.54" × 1.05")
Weight	875 g (without package) 1060 g (with package)


Available Model

DS-KH9510-WTE1

Dimension

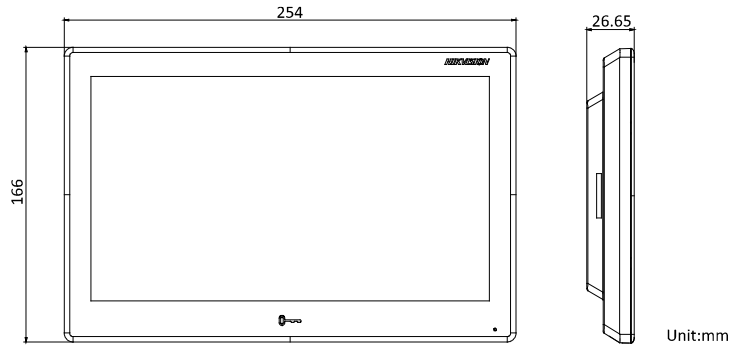

Appearance and Interfaces

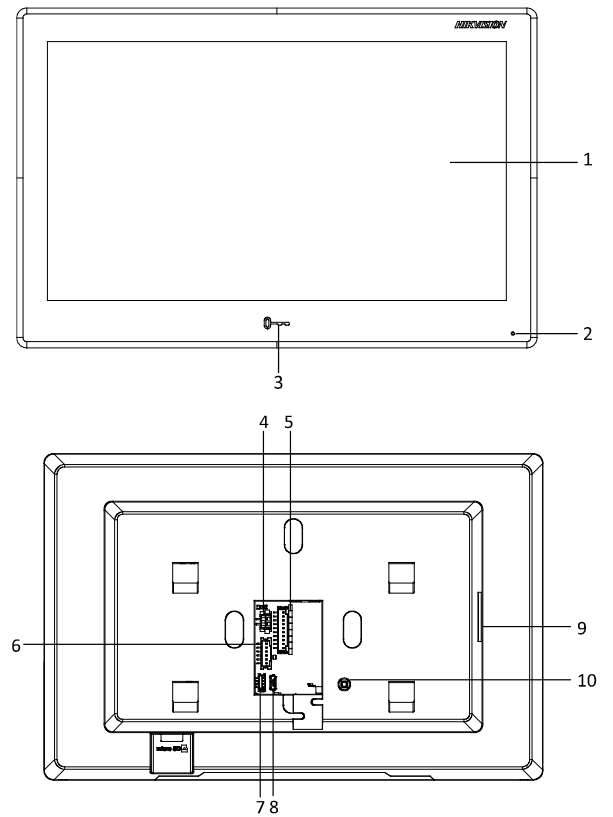

No.	Description	No.	Description
1	Display Screen	6	RS-485/Relay Interface
2	Microphone	7	Debugging Port
3	Unlock Button	8	Micro USB Interface
4	Power Terminal	9	Loudspeaker
5	Alarm Terminal	10	TAMPER

