
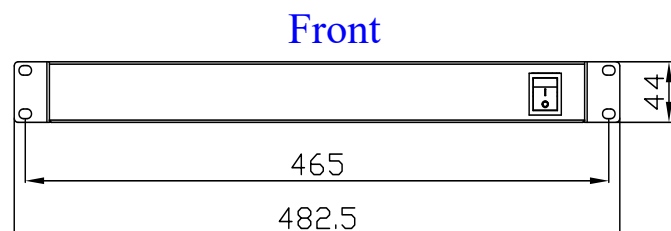

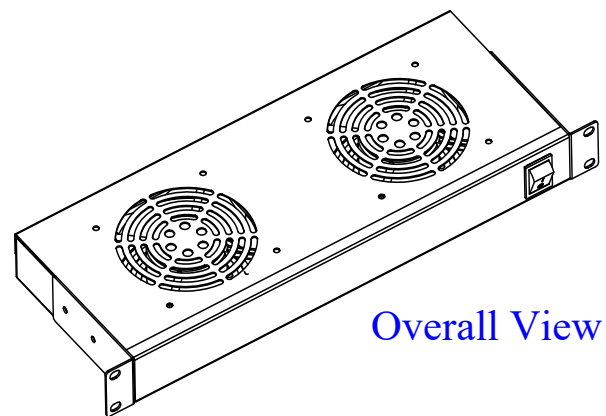


All-Rack™

1.	Rated Voltage	220V
2.	Frequency	50Hz
3.	Starting Voltage	180VAC
4.	Rated Speed	2200+-10%RPM
5.	Air Flow	68CFM
6.	Static Pressure	6.4mmH2O
7.	Rated Current	0.08Amp
8.	Input Power	15Watts
9.	Noise Level	44dB(A)
10.	Direction of Rotation	Counter – Clockwise
11.	Motor Protection	Impedance Protected
12.	Operation Temperature	-20%~80%
13.	Operation Humidity	20%~80%
14.	Bearing Style	Sleeve
15.	Life at 25°C	30,000
16.	Weight	450g
17.	Approval	CE TUV ROHS

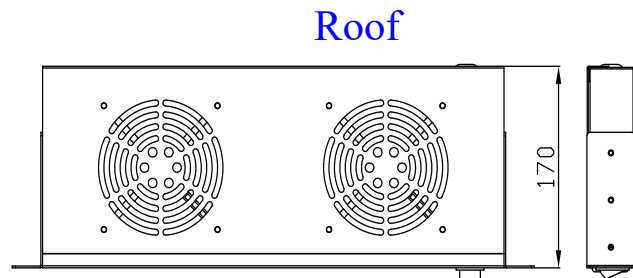

Compatible with all sizes of floor and wall cabinets.