

## iDS-7200HUHI-K1/4S(B) SERIES TURBO ACUSENSE DVR

### Key Feature

- Deep learning-based behavior analysis or facial detection
- H.265 Pro+/H.265 Pro/H.265 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Up to 8/16-ch IP camera inputs (up to 8 MP)
- Max. 800 m for 1080p and 1,200 m for 720p HDTVI signal transmission
- Up to 10 TB capacity per HDD



### Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Recording at up to 8 MP resolution

### Storage and Playback

- Smart search for efficient playback
- Support the third party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

### Smart Function

- Deep learning-based behavior analysis (line crossing and intrusion detection) or facial detection
- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras

### Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Output bandwidth limit configurable



[www.hikvision.com](http://www.hikvision.com)

## Specification


Model	iDS-7204HUHI-K1/4S(B)	iDS-7208HUHI-K1/4S(B)
<b>Facial Detection<sup>1</sup></b>		
Facial detection and capture	1-ch human face capture (HD analog camera)	
<b>Human/Vehicle Analysis<sup>1</sup></b>		
False alarm reduction	Up to 4-ch	
<b>Recording</b>		
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	
Encoding resolution	Main stream: 8 MP@8 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) <b>*: 8 MP@8 fps is only available for channel 1.</b>	Main stream: 8 MP@8 fps/5 MP@12 fps/ 4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)
	Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N)	
Video bitrate	32 Kbps to 10 Mbps	
Dual stream	Support	
Stream type	Video, Video & Audio	
Audio compression	G.711u	
Audio bitrate	64 Kbps	
<b>Video and Audio</b>		
IP video input	2-ch (up to 6-ch)	4-ch (up to 12-ch)
	IP enhanced mode on: 4-ch (up to 8-ch), each up to 4 Mbps	IP enhanced mode on: 8-ch (up to 16-ch), each up to 4 Mbps
	Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras	
Analog video input	4-ch	8-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	
HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps <b>*: The 8 MP signal input is only available for channel 1.</b>	8 MP, 5 MP, 4 MP, 3 MP, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps
AHD input	5 MP, 4 MP, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps	
HDCVI input	4 MP, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps	
CVBS input	PAL/NTSC	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz,	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz,

	1024 × 768/60Hz HDMI/VGA simultaneous output	1024 × 768/60Hz HDMI/VGA simultaneous output
<b>HDMI output</b>	1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output
<b>Audio input</b>	4-ch, RCA (2.0 Vp-p, 1 kΩ)	
<b>Audio output</b>	1-ch, RCA (Linear, 1 kΩ)	
<b>Two-way audio</b>	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the first audio input)	
<b>Synchronous playback</b>	4-ch	8-ch
<b>Network</b>		
<b>Remote connection</b>	32	64

<b>Network protocol</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF	
<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
<b>Auxiliary interface</b>		
<b>SATA</b>	1 SATA interface, up to 10 TB capacity for each disk	
<b>Serial interface</b>	RS-485 (half-duplex)	
<b>USB interface</b>	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 2.0	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0
<b>Alarm in/out</b>	4/1	8/4
<b>General</b>		
<b>Power supply</b>	12 VDC	
<b>Consumption (without HDD)</b>	≤ 10 W	≤ 15 W
<b>Working temperature</b>	-10 °C to +55 °C (+14 °F to +131 °F)	
<b>Working humidity</b>	10% to 90%	
<b>Dimension (W × D × H)</b>	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)	
<b>Weight (without HDD)</b>	≤ 1.16 kg (2.6 lb)	≤ 2 kg (4.4 lb)

1: Facial detection and human/vehicle analysis cannot be enabled at the same time. Enable one function will make the other one unavailable.

## Physical Interface

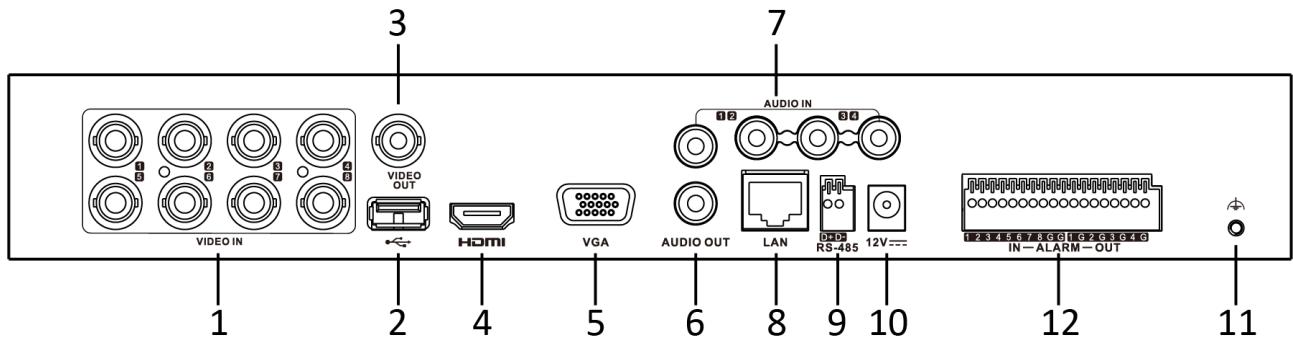

\*: The rear panel of iDS-7204HUHI-K1/4S(B) provides 4 video input interfaces.

No.	Description	No.	Description
1	VIDEO IN	7	AUDIO IN, RCA connector
2	USB interface	8	LAN network interface
3	VIDEO OUT	9	RS-485 serial interface
4	HDMI interface	10	12 VDC power input
5	VGA interface	11	GND
6	AUDIO OUT, RCA connector	12	ALARM IN/OUT

## Available Model

iDS-7204HUHI-K1/4S(B), iDS-7208HUHI-K1/4S(B)