

## iDS-7700NXI-I4/16P/X DeepinMind Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 16-ch perimeter protection
- Up to 8-ch facial recognition for video stream, or up to 16-ch facial recognition for face picture
- Up to 4-ch video structuralization
- Up to 16/32-ch IP cameras can be connected
- Up to 16-ch 1080p decoding capability



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- Up to 16-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR (Automatic Number-Plate Recognition), and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm




## Network & Ethernet Access

- 16 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

## Typical Application


### Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize list alarm and stranger alarm via face picture library. Search target people by picture and name features.

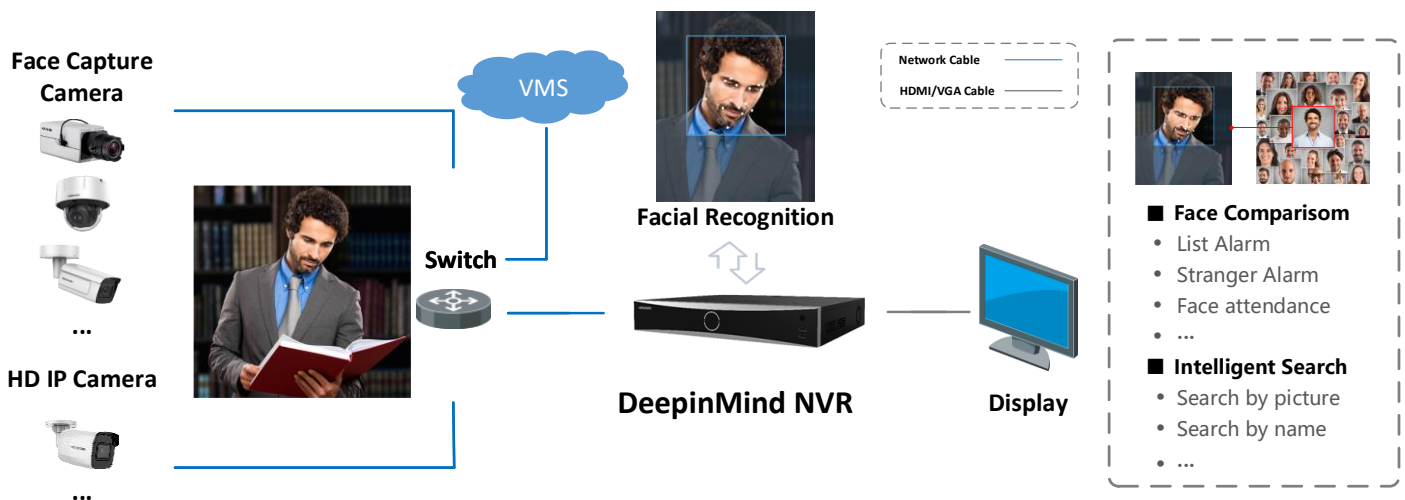


### Perimeter Protection

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

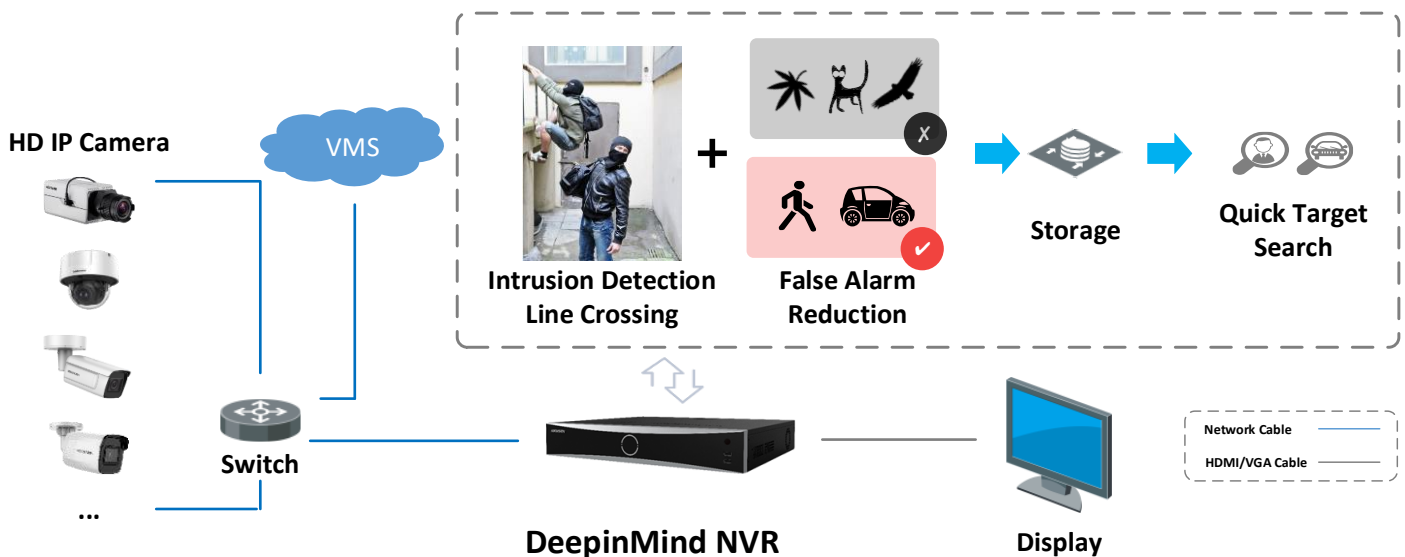

## Video Structuralization

Extracting the face picture, human body and vehicle features from live videos, which is used for the tracking and retrieval of human and vehicles.

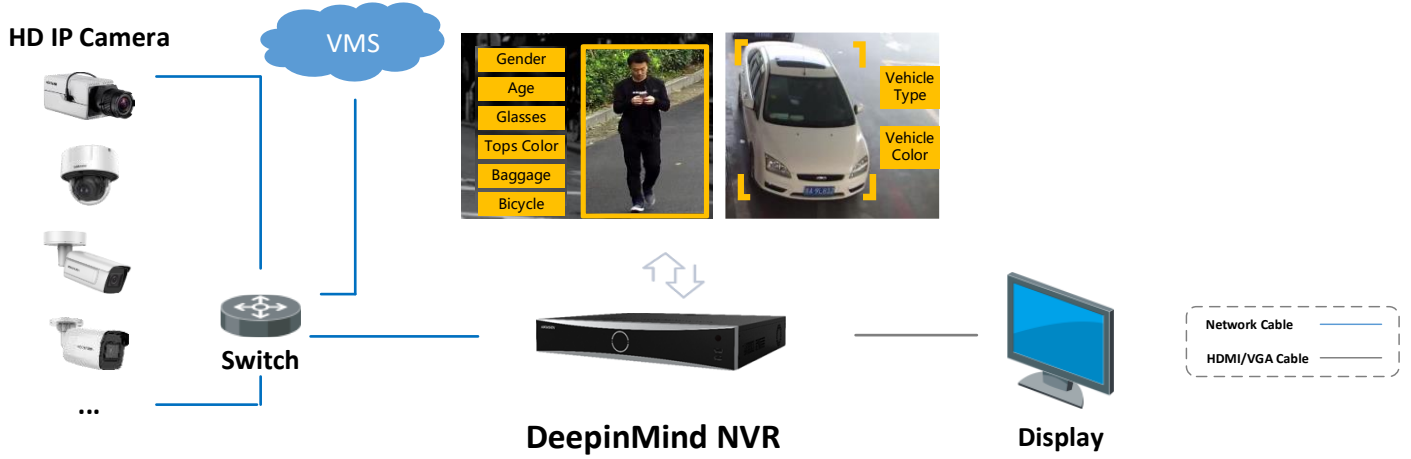

## Specification

Model	iDS-7716NXI-I4/16P/X	iDS-7732NXI-I4/16P/X
<b>Facial Recognition<sup>1</sup></b>		
Facial detection and analytics	Face picture comparison, human face capture, face picture search	
Face picture library	Up to 16 face picture libraries, with up to 100,000 face pictures in total (each picture ≤ 4 MB, total capacity ≤ 20 GB)	
Face picture comparison	16-ch face picture comparison alarm	
Performance of facial detection and analytics	8-ch 8 MP human face capture (HD network camera, up to 8 MP, H.264/H.265)	
<b>Perimeter Protection<sup>1</sup></b>		
Human/vehicle analysis	Up to 16-ch 4 MP (HD network camera, up to 8 MP, H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm	
<b>Video Structuralization<sup>1</sup></b>		
Structured analysis	Up to 8-ch 2 MP (HD network camera, up to 8 MP, H.264/H.265) live video structuralization analysis	
Face picture library	Up to 16 face picture libraries, with up to 100,000 face pictures in total	
Face picture comparison	8-ch face picture comparison alarm	
<b>Video and Audio</b>		
IP video input	16-ch	32-ch
	Up to 12 MP resolution	
Incoming bandwidth	320 Mbps	
Outgoing bandwidth	256 Mbps	
HDMI1 output	1-ch, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
HDMI2 output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Video output mode	HDMI1/VGA simultaneous output, HDMI2/VGA independent output	
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
Audio output	1-ch, RCA (Linear, 1 KΩ)	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
<b>Decoding</b>		
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4	
Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous playback	16-ch	
Capability	16-ch@1080p (30 fps)	
Dual stream recording	Support	
Stream type	Video, Video & Audio	
Audio compression	G.711ulaw/G.711alaw/G.722/G.726/MP2L2	
<b>Network</b>		
Remote connections	128	
Network protocol	TCP/IP, DHCP, IPv4, IPv6, Hik-Connect, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP,	

	NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
<b>Network interface</b>	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>PoE</b>	
<b>Interface</b>	16, RJ-45 10/100 Mbps self-adaptive Ethernet interface
<b>Power</b>	≤ 200 W
<b>Supported standard</b>	IEEE 802.3 af/at
<b>Auxiliary interface</b>	
<b>Serial port</b>	RS-485 (half-duplex), RS-232, keyboard
<b>SATA</b>	4 SATA interfaces
<b>Capacity</b>	Up to 10 TB capacity for each disk
<b>eSATA</b>	1 eSATA interface
<b>Alarm in/out</b>	16/8
<b>USB interface</b>	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
<b>General</b>	
<b>Power supply</b>	100 to 240 VAC, 50 to 60 Hz
<b>Consumption (without HDD and PoE off)</b>	≤ 30 W
<b>Working temperature</b>	-10 °C to 55 °C (14 °F to 131 °F)
<b>Working humidity</b>	10% to 90%
<b>Chassis</b>	19-inch rack-mounted 1.5U chassis
<b>Dimension (W × D × H)</b>	445 × 400 × 75 mm ( 17.5" × 15.7" × 3.0")
<b>Weight (without HDD)</b>	≤ 5 kg (11 lb)
<b>Certification</b>	
<b>Obtained Certification</b>	CE, FCC, UL, CB, WEEE, BIS, IC, RCM, KC, LOA
<b>CE</b>	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
<b>FCC</b>	Part 15 Subpart B, ANSI C63.4-2014


1: The device has three engine modes: facial recognition, perimeter protection, and video structuralization, among which no more two modes can be enabled at the same time. When two modes are enabled, capacity is as follows.

Perimeter protection: 8-ch

Video structuralization: 2-ch live video structuralization analysis and 4-ch face picture comparison alarm


Facial recognition: 4-ch face capture and 8-ch face picture comparison alarm

# Dimension

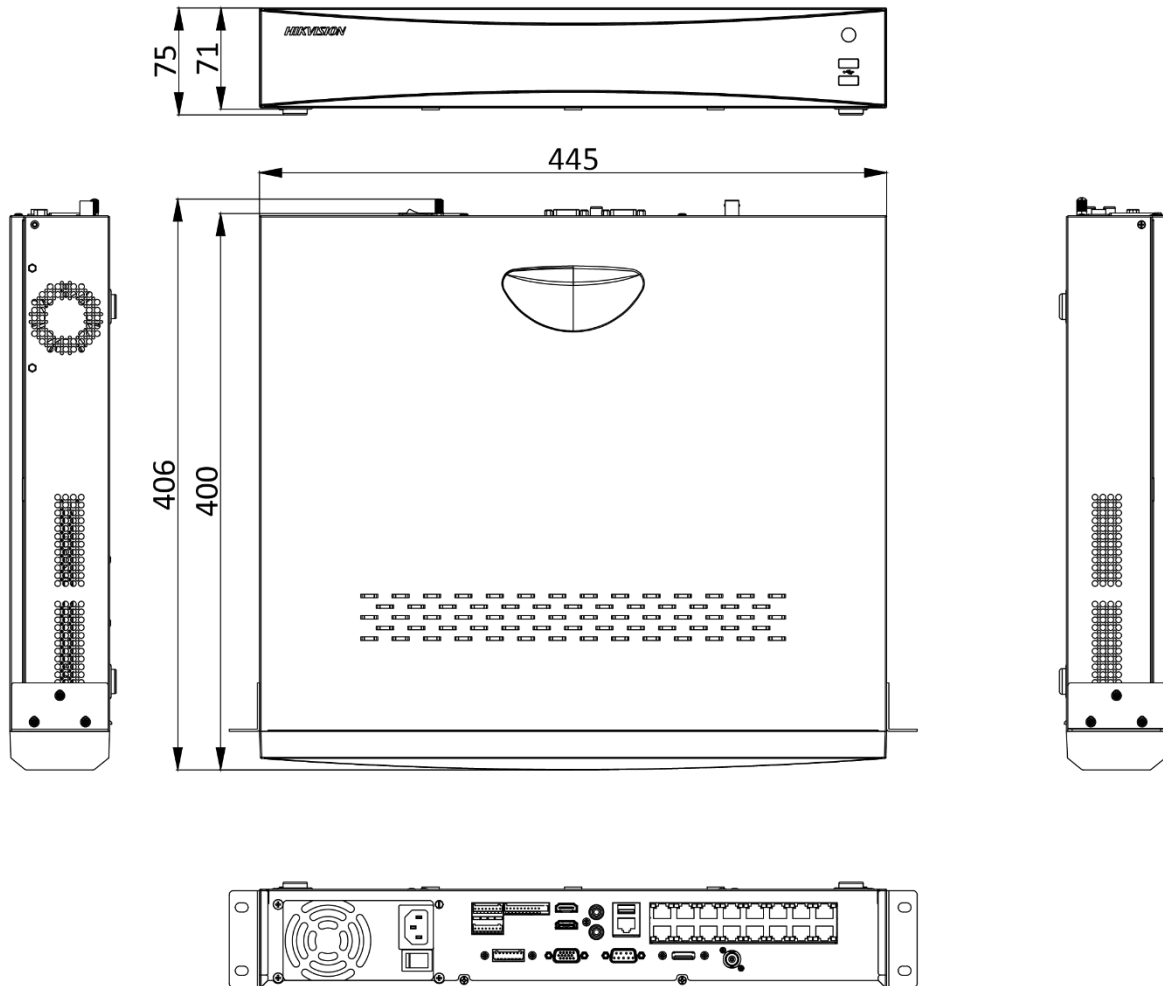

scale/1:1;Unit/mm

## Physical Interface

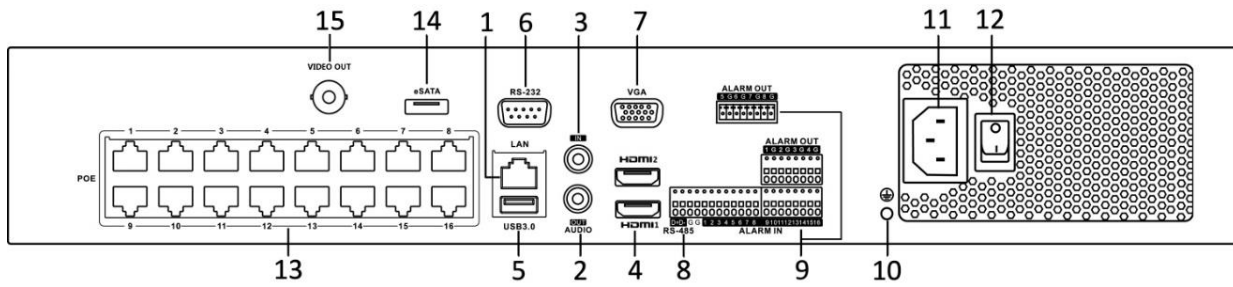

No.	Description	No.	Description
1	LAN Interface	9	Controller Port, Alarm In/Alarm Out
2	AUDIO OUT	10	GND
3	AUDIO IN	11	100 to 240 VAC Power Supply
4	HDMI1 and HDMI2 Interfaces	12	Power Switch
5	USB 3.0 Interface	13	Network Interfaces with PoE function
6	RS-232 Serial Interface	14	eSATA Interface
7	VGA Output (DB9 Connector)	15	VIDEO OUT
8	RS-485 Serial Interface		

## Available Model

iDS-7716NXI-I4/16P/X, iDS-7732NXI-I4/16P/X