



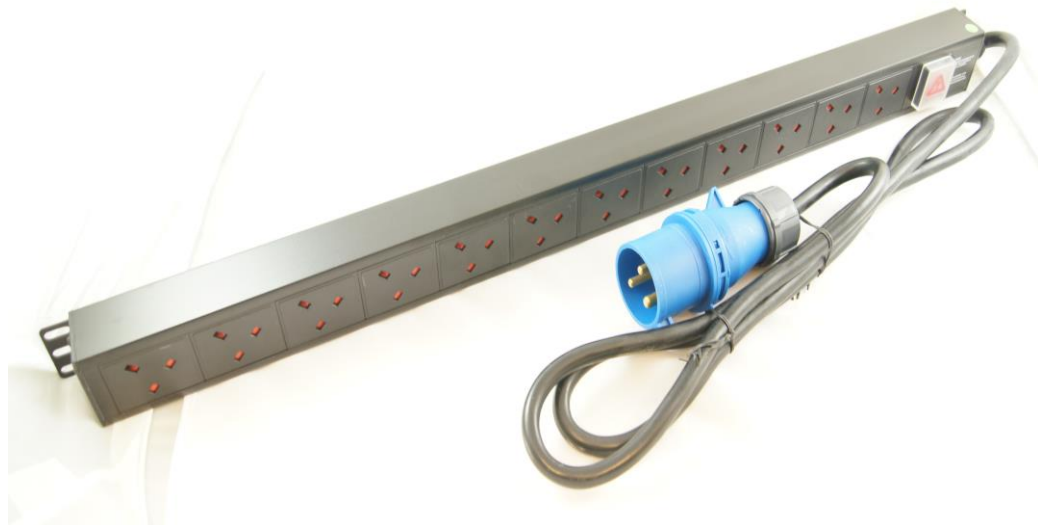

PDU SPECIFICATION

Date: 13/11/2017		
Product Name:	12 WAY VERTICAL PDU WITH 32AMP COMMANDO PLUG	RoHS: Yes
Part Number:	PDU12V32	
Item	Detailed Description	
Product Series	UK TYPE	
Socket Type	32A 250V UK 45 Degree	
Socket Quantity	12 Ways	
Power Input	Cable exit on the right	
Bracket Install	Vertical Installation	
Cable With Plug	Commando Plug 32Amp	
Control Function	No Switch	
Protection Function	Neon Light	
Case	Black Aluminium	
Cable specification	3 x 6mm ² x 2.5MM	
Product Size	L x W x H = 343.4 x 52 x 44mm (1.5U)	
Switch	Shrouded illuminated switch	
Fittings	4 pcs cage nuts sets	
Product Label	Product Name	Designated PDU for Cabinet
	Specification Model	
	Rating Voltage	250VAC 50/60Hz
	Rating Current	32 A
	Max. Current	
	Max Power	8000W
	Safety Authentication	CE
	Logo	AllRack
	Producer	
Socket Assemble	No	
Interior Connection Wire	Copper Bar	
Interior Connection Style	Standard Connection	
Cable Fixing	Small Cable Clamp	

This technology specification is for: design product for customer and confirm customer's requirements, and is also the basic gist for arranging production.

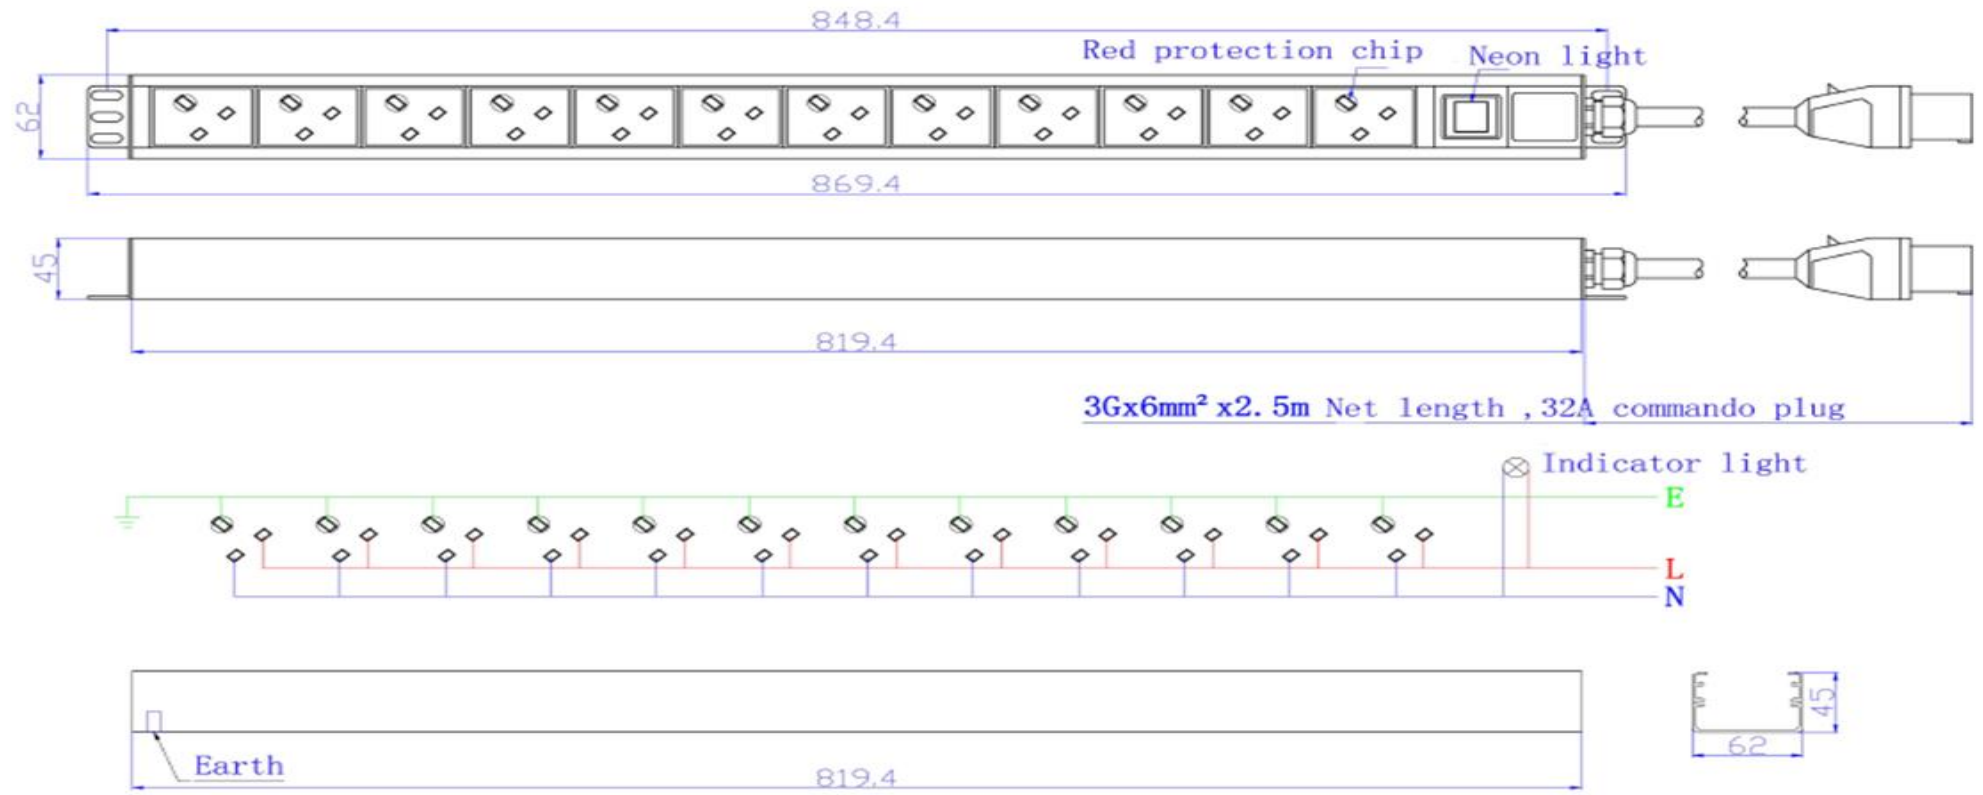

Dimensions + Tolerances (Unit:mm)	All-Rack [®]	
Length: 464	Designated power distribution Unit for 19" cabinet	
Mounting Length:	Part Number	
Width: 44	PDU12V32	
Case Length: 44		
Height: 44		
Case tolerance: ±		