




## PDU SPECIFICATION

|                                  |  |                            |
|----------------------------------|--|----------------------------|
| <b>Date:</b> 13/11/2017          |  |                            |
| <b>Product Name:</b>             | 4 WAY HORIZONTAL PDU                   | RoHS: Yes                  |
| <b>Part Number:</b>              | PDU4HSUR                               |                            |
| <b>Item</b>                      | <b>Detailed Description</b>            |                            |
| <b>Product Series</b>            | UK TYPE                                |                            |
| <b>Socket Type</b>               | BS1362 13A 250V 90°                    |                            |
| <b>Socket Quantity</b>           | 4 UK Sockets                           |                            |
| <b>Power Input</b>               | Cable exit on the back of the PDU      |                            |
| <b>Bracket Install</b>           | Horizontal Installation                |                            |
| <b>Cable With Plug</b>           | UK TYPE PLUG 13AMP                     |                            |
| <b>Control Function</b>          | NO/OFF switch                          |                            |
| <b>Protection Function</b>       | Surge Protection                       |                            |
| <b>Case</b>                      | Black Aluminium                        |                            |
| <b>Cable specification</b>       | 3 x 1.5mm <sup>2</sup> x 2.5MM         |                            |
| <b>Product Size</b>              | L x W x H = 464 x 44.4 x 44.4mm (1.0U) |                            |
| <b>Switch</b>                    | Shrouded illuminated switch            |                            |
| <b>Fittings</b>                  | 4 pcs cage nuts sets                   |                            |
| <b>Product Label</b>             | Product Name                           | Designated PDU for Cabinet |
|                                  | Specification Model                    |                            |
|                                  | Rating Voltage                         | 250VAC 50/60Hz             |
|                                  | Rating Current                         | 13A                        |
|                                  | Max. Current                           |                            |
|                                  | Max Power                              | 3250W                      |
|                                  | Safety Authentication                  | CE                         |
|                                  | Logo                                   | AllRack                    |
|                                  | Producer                               |                            |
| <b>Socket Assemble</b>           | No                                     |                            |
| <b>Interior Connection Wire</b>  | Copper Bar                             |                            |
| <b>Interior Connection Style</b> | Standard Connection                    |                            |
| <b>Cable Fixing</b>              | Small Cable Clamp                      |                            |

This technology specification is for: design product for customer and confirm customer's requirements, and is also the basic gist for arranging production.

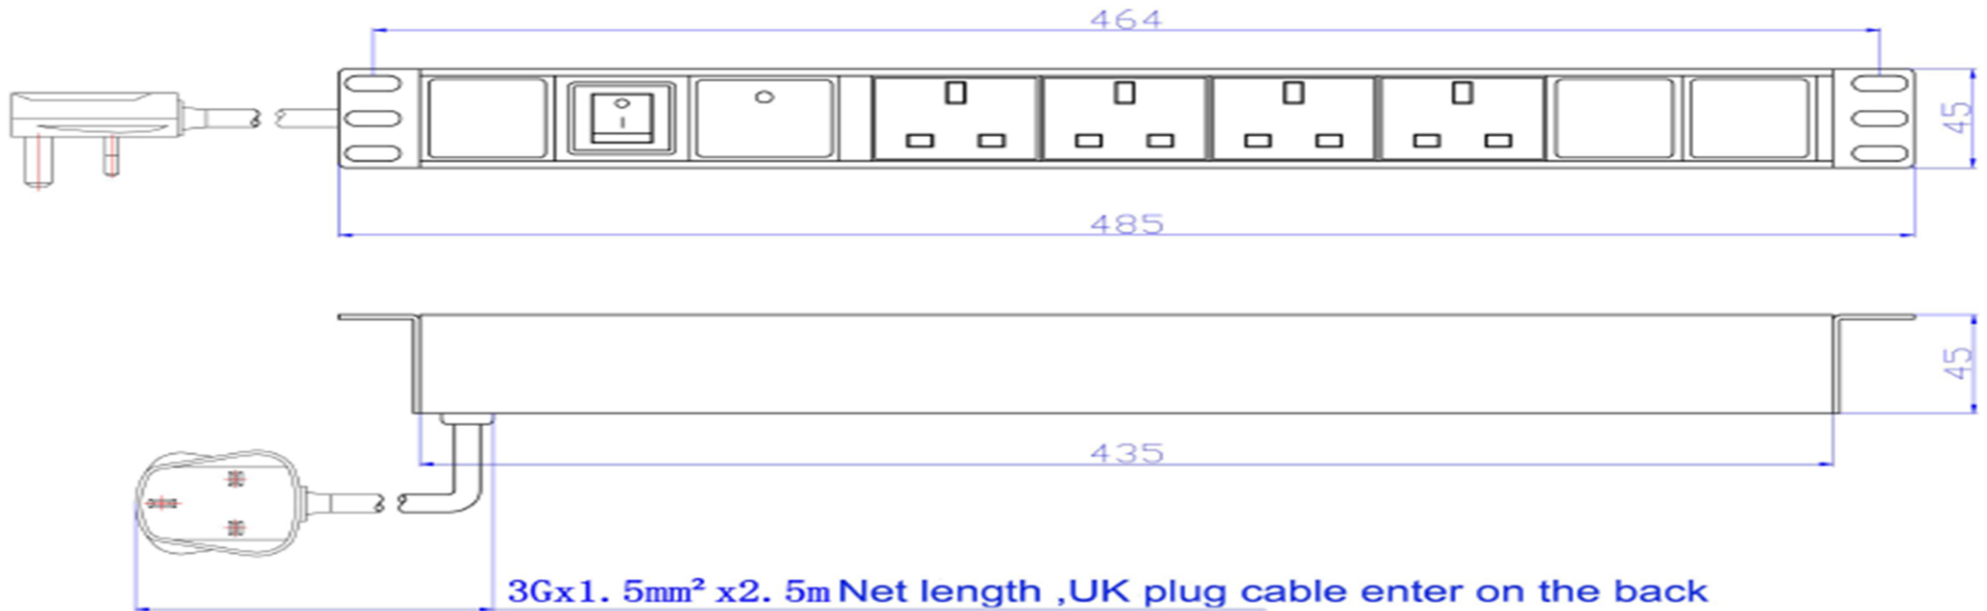

Dimensions + Tolerances  
(Unit:mm)

Length:464  
Mounting Length:  
Width: 44  
Case Length: 48.3  
Height: 44  
Case tolerance: ±

**All-Rack**<sup>®</sup>

Designated power distribution Unit for 19" cabinet

|             |          |
|-------------|----------|
| Part Number | PDU4HSUR |
|-------------|----------|