


PDU SPECIFICATION

Date: 13/11/2017						
Product Name:	24 WAY IEC PDU 20 X C13 + 4 X C19 - RoHS: Yes 32AMP COMMANDO PLUG					
Part Number:	PDUIEC24C13C19					
Item	Detailed Description					
Product Series	UK TYPE					
Socket Type	32A 250V 20 X IEC C13 +4X IEC C19					
Socket Quantity	24 ways					
Power Input	Cable exit on right					
Bracket Install	Vertical Installation					
Cable With Plug	Commando Plug 32 Amp					
Control Function	No Switch					
Protection Function	Neon Light					
Case	Black Aluminium					
Cable specification	3 x 6.00mm ² x 2.5MM					
Product Size	L x W x H = 1174 x 62 x 44mm (1.5U)					
Switch						
Fittings	4 pcs cage nuts sets					
Product Label	Product Name	Designated PDU for Cabinet				
	Specification Model					
	Rating Voltage	250VAC 50/60Hz				
	Rating Current	32 AMP				
	Max. Current					
	Max Power	8000W				
	Safety Authentication	CE				
	Logo	AllRack				
	Producer					
Socket Assemble	No					
Interior Connection Wire	Copper Bar					
Interior Connection Style	Standard Connection					
Cable Fixing	Small Cable Clamp					
Cable Fixing	Sinan Cavic Cianip					

This technology specification is for: design product for customer and confirm customer's requirements, and is also the basic gist for arranging production.



Preview

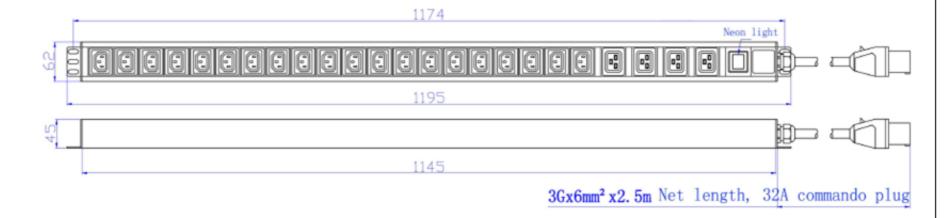



DIMENSION AND TOLERANCES (Unit: mm) Length: 1174 Mounting length:		All-Rack				
Width: 62 Case length:			Attock Network Products Ltd			
Height:	eight: 44 Case tolerance: 🛨 1.0		Product name	Designated Power Distribution Unit for Cabinet		
		SIGN	DATE	Part number	PDUIEC24C13C19	
DRAWN				Customer's Name		
CHK'D				Drawing number		
APP'D				Edition number		