

R5000 - 10-32 Server Rack Enclosure


*A new generation of
server rack enclosures*



The R4000 brings in a new generation for server rack enclosures. It has a multitude of added features that will revolutionize server cabinet management, including integral cable management bars and adjustable threaded rail racks.

Made of steel, the enclosure has a lockable plain back door and typically comes with a lockable glass front door, made from shatterproof polycarbonate, though plain steel or vented steel front doors are also available. Its hidden assembly screws and rolled edges give the cabinet a sleek, minimalistic finish. This product is also available in custom sizes and colors.

- Bayable
- Can be built as open, sides only or closed
- Adjustable threaded rail racks
- Door can be unpinned and rotated to lock from opposite direction
- Removable side panels
- Optional side door locks
- Magnetic indents to secure doors
- Can customize top and bottom
- Multiple mounting options for casters and feet
- Integral horizontal cable trays
- Integral vertical cable management bars
- Earth points
- IP30 version available
- Hidden assembly screws
- Rolled sided and hidden front handle for a sleek finish
- Available front doors: Glass (shatterproof polycarbonate), Plain Steel or Vented Steel
- Custom sizes and colors available

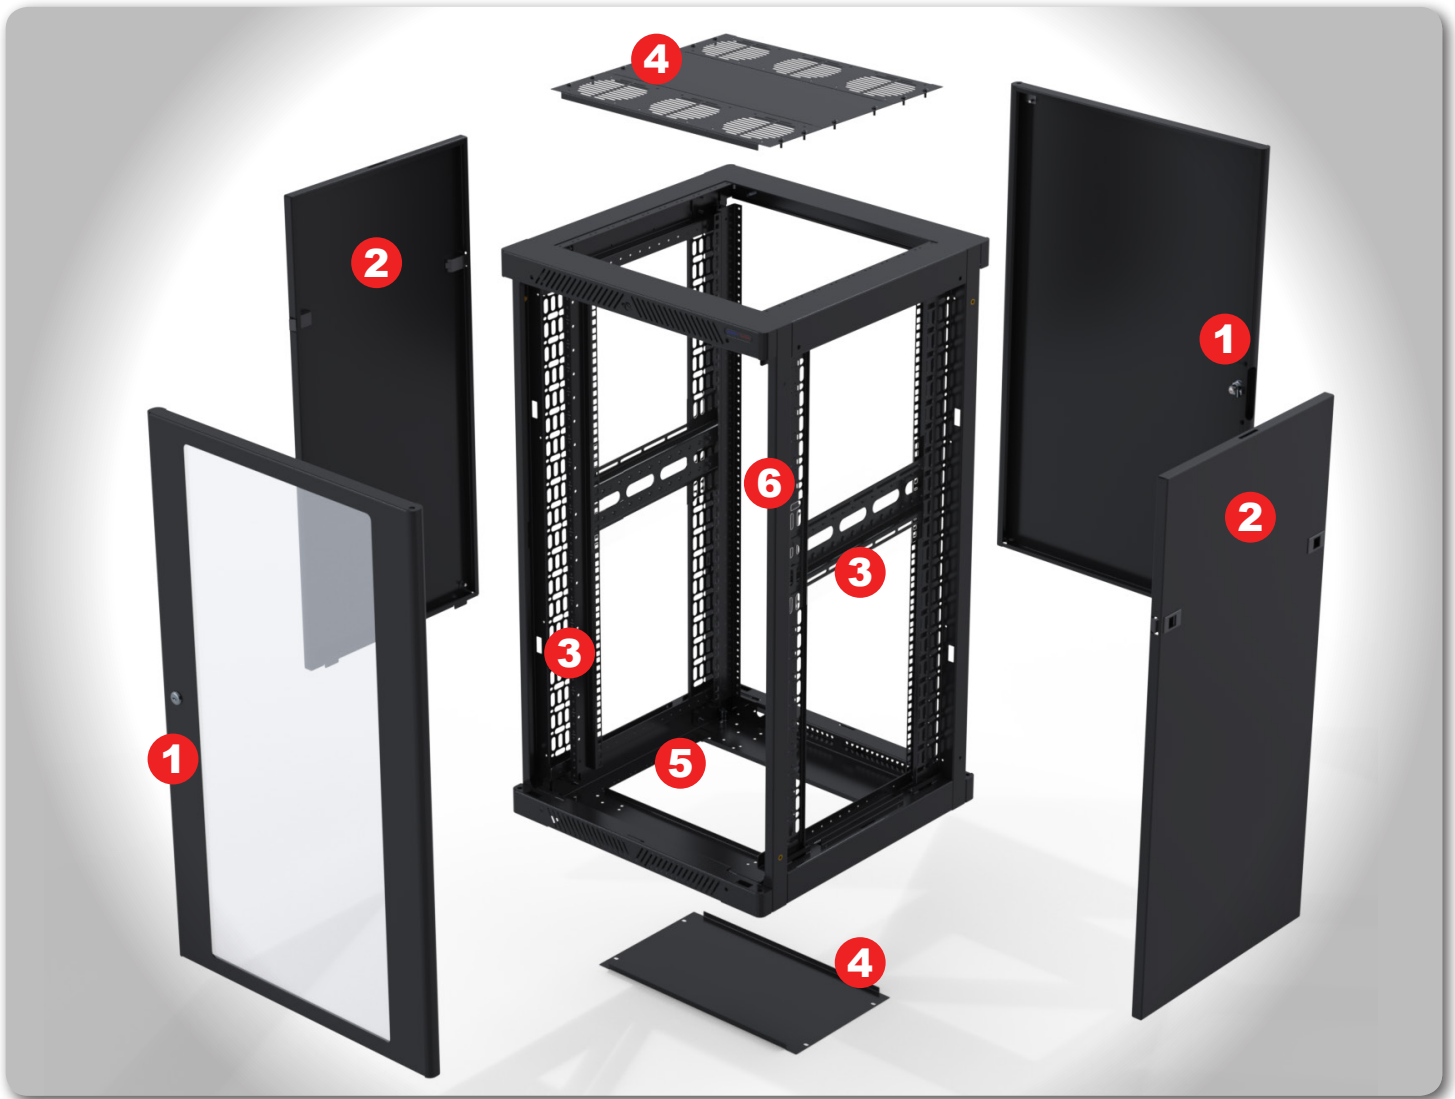

1 Front & Back Doors

- Can be removed or rotated
- Magnetic Indents
- Available in glass, plain steel or vented Steel



2 Side Panels

- Easy to open with slam latches
- Removable
- Optional locks



3 Cable Management

- Four integral vertical cable management bars
- Two integral horizontal cable trays



4 Customisable

- Modular Top & Bottom Units
- From 6U to 18U available on the top and the bottom of each enclosure



5 2" Casters

1.6" x 1.6" hole patterns for 2" casters. See part numbers W0960 and W0995 for 2" casters .



5 3" & 4" Casters

3.15" x 2.36" hole patterns for 3" & 4" casters. See W0980 for 3" casters and W9000-V6 for 4" casters.



5 Adjuster feet

M12 holes for adjuster feet. See part number R8295 for sets of 4 adjuster feet from 1.18" (min) to 3.74" (max).



6 Rack Rails

- Adjustable mounting depth from 6" to 35.45"
- No more cage nuts with the 10-32 threaded rack rails



R5066 Series

Width x Depth	23.6" x 23.6"
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 5.9" - Max: 19.68"
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R5086 Series

Width x Depth	23.6" x 31.5"
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 5.9" - Max: 27.56"
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R5106 Series

Width x Depth	23.6" x 39.4"
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 5.9" - Max: 35.43"
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R5088 Series

Width x Depth	31.5" x 31.5"
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 5.9" - Max: 27.56"
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

R5108 Series

Width x Depth	31.5" x 39.4"
Available Unit Sizes:	22U, 32U, 37U, 42U or 47U
Mounting Depths:	Min: 5.9" - Max: 35.43"
Available Front Doors:	Glass or Perforated Steel
Load Capacity:	

WxD Available Sizes (Width x Depth):
 23.6" x 23.6" / 23.6" x 31.5" / 23.6" x 39.4"
 31.5" x 31.5" / 31.5" x 39.4"

U Available Unit Sizes:
 22U, 32U, 37U, 42U and 47U

Custom sizes and colours available

	Rack Units	Height	Weight	Width	Depth	Door
R5066-22UK	22U	42.5"/ 1079.4mm		23.6"/ 600mm	23.6"/ 600mm	Glass Door
R5066-32UK	32U	60"/ 1523.9mm				
R5066-37UK	37U	68.7"/ 1746.1mm				
R5066-42UK	42U	77.5"/ 1968.4mm				
R5066-47UK	47U	86.25"/ 2190.6mm				
R5086-22UK	22U	42.5"/ 1079.4mm		23.6"/ 600mm	31.5"/ 800mm	Glass Door
R5086-32UK	32U	60"/ 1523.9mm				
R5086-37UK	37U	68.7"/ 1746.1mm				
R5086-42UK	42U	77.5"/ 1968.4mm				
R5086-47UK	47U	86.25"/ 2190.6mm				
R5106-22UK	22U	42.5"/ 1079.4mm		23.6"/ 600mm	39.4"/ 1000mm	Glass Door
R5106-32UK	32U	60"/ 1523.9mm				
R5106-37UK	37U	68.7"/ 1746.1mm				
R5106-42UK	42U	77.5"/ 1968.4mm				
R5106-47UK	47U	86.25"/ 2190.6mm				
R5088-22UK	22U	42.5"/ 1079.4mm		31.5"/ 800mm	31.5"/ 800mm	Glass Door
R5088-32UK	32U	60"/ 1523.9mm				
R5088-37UK	37U	68.7"/ 1746.1mm				
R5088-42UK	42U	77.5"/ 1968.4mm				
R5088-47UK	47U	86.25"/ 2190.6mm				
R5108-22UK	22U	42.5"/ 1079.4mm		31.5"/ 800mm	39.4"/ 1000mm	Glass Door
R5108-32UK	32U	60"/ 1523.9mm				
R5108-37UK	37U	68.7"/ 1746.1mm				
R5108-42UK	42U	77.5"/ 1968.4mm				
R5108-47UK	47U	86.25"/ 2190.6mm				
R5066-V-22UK	22U	42.5"/ 1079.4mm		23.6"/ 600mm	23.6"/ 600mm	Vented Door
R5066-V-32UK	32U	60"/ 1523.9mm				
R5066-V-37UK	37U	68.7"/ 1746.1mm				
R5066-V-42UK	42U	77.5"/ 1968.4mm				
R5066-V-47UK	47U	86.25"/ 2190.6mm				
R5086-V-22UK	22U	42.5"/ 1079.4mm		23.6"/ 600mm	31.5"/ 800mm	Vented Door
R5086-V-32UK	32U	60"/ 1523.9mm				
R5086-V-37UK	37U	68.7"/ 1746.1mm				
R5086-V-42UK	42U	77.5"/ 1968.4mm				
R5086-V-47UK	47U	86.25"/ 2190.6mm				
R5106-V-22UK	22U	42.5"/ 1079.4mm		23.6"/ 600mm	39.4"/ 1000mm	Vented Door
R5106-V-32UK	32U	60"/ 1523.9mm				
R5106-V-37UK	37U	68.7"/ 1746.1mm				
R5106-V-42UK	42U	77.5"/ 1968.4mm				
R5106-V-47UK	47U	86.25"/ 2190.6mm				
R5088-V-22UK	22U	42.5"/ 1079.4mm		31.5"/ 800mm	31.5"/ 800mm	Vented Door
R5088-V-32UK	32U	60"/ 1523.9mm				
R5088-V-37UK	37U	68.7"/ 1746.1mm				
R5088-V-42UK	42U	77.5"/ 1968.4mm				
R5088-V-47UK	47U	86.25"/ 2190.6mm				
R5108-V-22UK	22U	42.5"/ 1079.4mm		31.5"/ 800mm	39.4"/ 1000mm	Vented Door
R5108-V-32UK	32U	60"/ 1523.9mm				
R5108-V-37UK	37U	68.7"/ 1746.1mm				
R5108-V-42UK	42U	77.5"/ 1968.4mm				
R5108-V-47UK	47U	86.25"/ 2190.6mm				