

Superior product line

CombiProtect S Jeweller

Wireless motion and glass break detector.







What's new

Baseline CombiProtect Jeweller	Superior CombiProtect S Jeweller	
SmartBracket mounting panel without holding screw	SmartBracket mounting panel with holding screw	
Common battery	Enhanced battery	
Glossy enclosure	Matte enclosure	
Available for all PROs	Available only for accredited partners	


This is the device of the **Superior product line**. Superior products are advanced versions of Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.

Motion detection

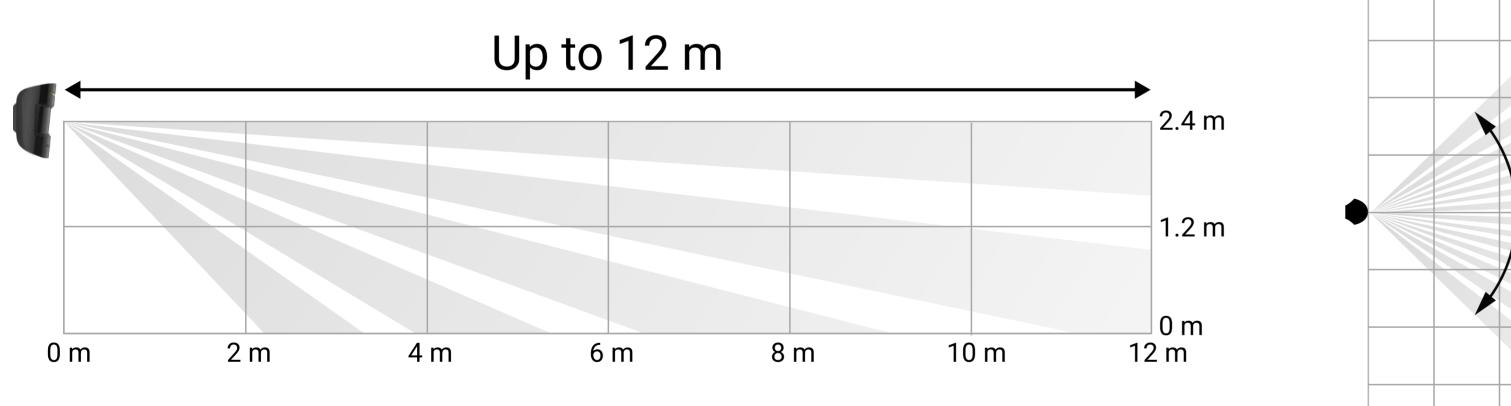


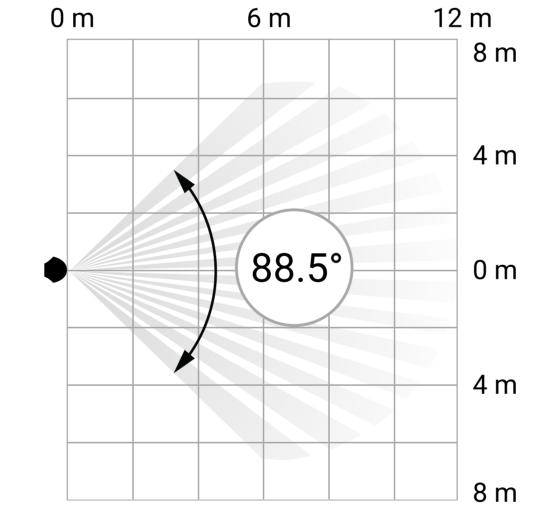


- SmartDetect algorithm to prevent false alarms
- Temperature compensation
- Pet immunity



Glass break detection

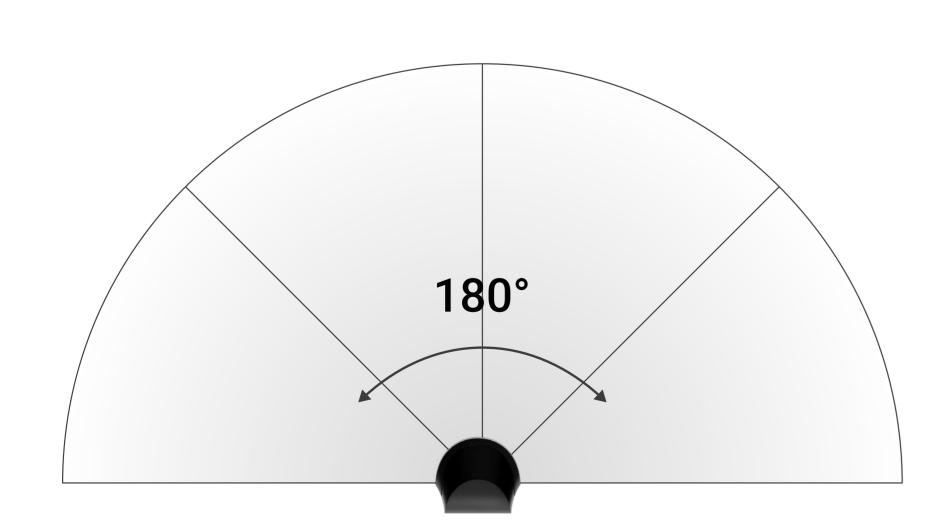

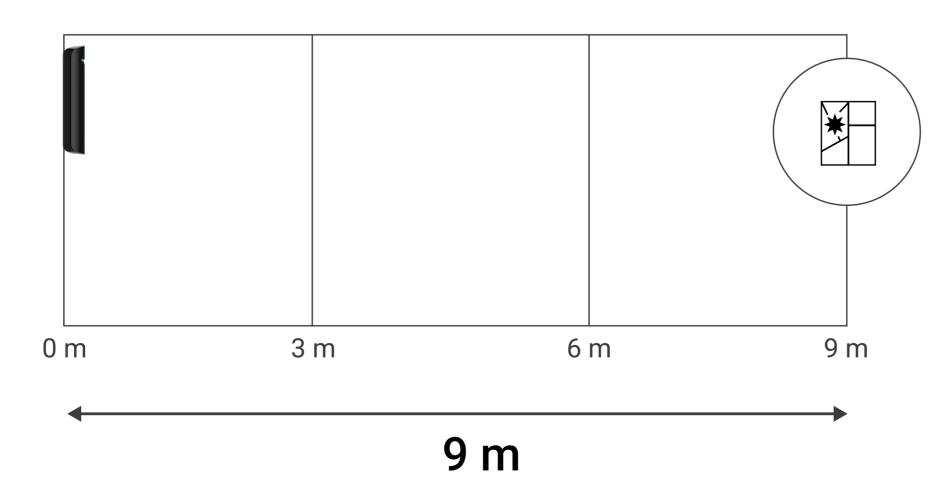

- DualTone two-factor glass break verification algorithm: by low and high frequencies
- Filter for false alarms caused by dog barking or truck-passing sounds



Jeweller


communication technology

- Up to 1,200 m of radio communication in an open space
- Data is encrypted throughout the transmission process
- Regular polling to display current device statuses



Sabotage resistance

- Tamper alarm
- Device authentication to prevent spoofing
- Jamming detection
- Holding screw to secure the device on SmartBracket



Flawless autonomy

- Up to 5 years of battery life
- Low battery notifications
- Panasonic pre-installed battery



Quick installation and setup

- Pairing with a hub via QR code
- Remote control and configuration in the app
- Effortless installation and replacement

Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

Compliance with standards	Communication with control panel	Motion detection	Glass break detection
EN 50131-2-2 (Grade 2) EN 50131-2-7-1 PD 6662:2017	Jeweller communication technology	Sensitive element 1 × PIR sensor	Sensitive elements 1 × electret microphone
SSF (coming soon) NFA2P (coming soon)	Frequency bands 868,0 — 868,6 MHz	Detection distance up to 12 m	Glass break detection distance up to 9 m
Compatibility Hubs Hub Plus, Hub 2 (2G), Hub 2 (4G), Hub 2 Plus, Hub Hybrid (2G), Hub Hybrid (4G) Range extenders ReX, ReX 2	Communication range up to 1,200 m In an open space	Motion detection angles horizontal — 88.5° Pet immunity weight: up to 20 kg height: up to 50 cm	Horizontal glass break detection angle 180°
Power supply	Installation	Enclosure	Complete set
Battery 1 × CR123A	Operating temperature range from -10°C to +40°C	Colour white, black	CombiProtect S Jeweller 1 × CR123A battery (pre-installed)
Battery life up to 5 years	Operating humidity up to 75%	Dimensions 110 × 65 × 50 mm	SmartBracket with holding screw Installation kit
Manufacturer Panasonic	Protection class IP50	Weight 92 g	Quick start guide



For detailed information, scan the QR code or follow the link: