ЛЛХ

Superior product line

MotionCam S (PhOD) Jeweller

Wireless indoor motion detector supporting photo verification of alarms, **Photo on Demand** and **Photo by Scenario** functions.




What's new


Baseline MotionCam (PhOD) Jeweller	Superior MotionCam S (PhOD) Jeweller
SmartBracket mounting panel without holding screw	SmartBracket mounting panel with holding screw
Common battery	Enhanced battery
Available for all PROs	Available only for accredited partners

This is the device of the **Superior product line**. Superior products are advanced versions of the Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.

式 Motion detection

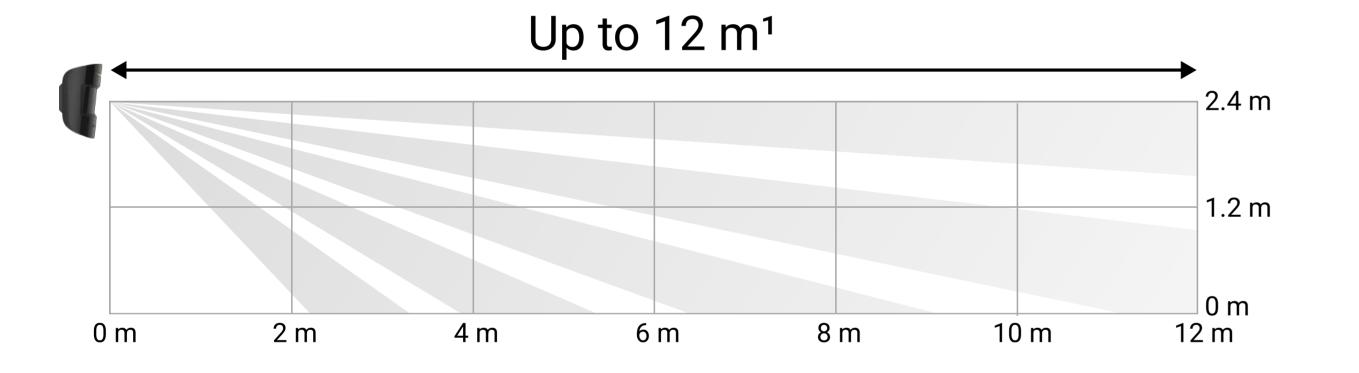

1 – according to INCERT certification, detection range is up to 10 m (high sensitivity).

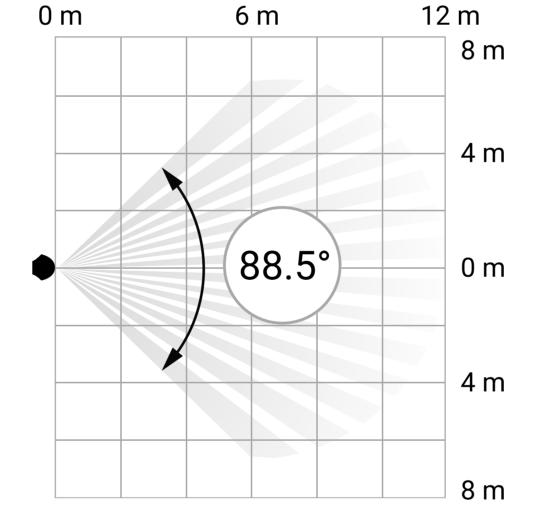

- SmartDetect algorithm to prevent false alarms
- Temperature compensation
- Pet immunity



The detector has a built-in camera to request and view photos via Ajax apps.

Up to 640 × 480 pixels photo resolution

There are three types of photo verification: by alarm, by scenario, and on demand.

- Up to 5 photos in a series
- IR backlight for low light conditions

Solution technology

- Up to 1,700 m of radio communication in an open space
- Data is encrypted throughout the transmission process
- Regular polling to display current device statuses



- Up to 1,700 m of radio communication in an open space
- Unique uploading algorithm and data delivery confirmation
- Data backup and resending if the transmission is interrupted



- Tamper alarm
- Device authentication to prevent spoofing
- Jamming detection
- Holding screw to secure the device on SmartBracket

Flawless autonomy

- Up to 5 years of battery life
- Low battery notifications
- Panasonic pre-installed battery

Quick installation and start-up

- Pairing with a hub via QR code
- Remote control and configuration in the app
- Effortless installation and replacement

Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

Compliance with standards	Communication with control panel	Motion detection	Photo verification
EN 50131-2-2 (Grade 2)	leweller + Wings communication	Sensitive element	Photo resolution in nivels

EN 50131-2-2 (Grade 2) PD 6662:2017 INCERT (coming soon)	Jeweller + Wings communication technologies	Sensitive element 1 × PIR sensor	Photo resolution in pixels 640 × 480 320 × 240 (default)
SSF (coming soon)	Frequency bands	Detection distance	160×120
NFA2P (coming soon)	868,0 — 868,6 MHz	up to 12 m ¹	Adjusted by PRO or user with admin rights in the Ajax app
Compatibility	Communication range	Detection angles	
oompationity	up to 1,700 m	horizontal – 88.5°	Photos in a series
Hubs	In an open space		from 1 to 5 pics
Hub 2 (2G), Hub 2 (4G), Hub 2 Plus,		Pet immunity	Adjusted by PRO or user
Hub Hybrid (2G), Hub Hybrid (4G)		weight: up to 20 kg height: up to 50 cm	with admin rights in the Ajax app
Range extenders ReX 2			IR backlight
Power supply	Installation	Enclosure	Complete set
Batteries	Operating temperature range	Colour	MotionCam S (PhOD) Jeweller
2 × CR123A	from -10° C to $+40^{\circ}$ C	white, black	2 x CR123A
			(pre-installed)
Battery life	Operating humidity	Dimensions	SmartBracket with holding screw
up to 5 years	up to 75%	135 × 70 × 60 mm	Installation kit Quick start guide
Manufacturer	Protection class	Weight	

1 – according to INCERT certification, detection range is up to 10 m (high sensitivity).



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/motioncam-s-phod/

support@ajax.systems

- @AjaxSystemsSupport_Bot
- ajax.systems