


- 4 Years Warranty
- Inbuilt LTE filter
- LED power indicator
- Colour coded inputs and outputs
- Tap outputs on top of unit for easy access
- Comes with high quality colour coded leads included
- Auxiliary 18V Input injects power to HL & HH trunk cables
- Taps and Splitters can be connected together to create a multitude of splitters with varying attenuation levels

Whyte Series 5 Taps & Splitters are a range of 5 wire passive devices that distribute Satellite and Terrestrial Signals. The range includes 1 way, 2 way and 3 way Taps with either a 10dB or 20dB tap off and a 2 way Splitter. For ease of installation, each unit comes complete with high quality colour coded 600mm F-type leads.

This enables the Multiswitches to be positioned either side of the Tap or Splitter, and to be orientated vertically or horizontally depending on available space.

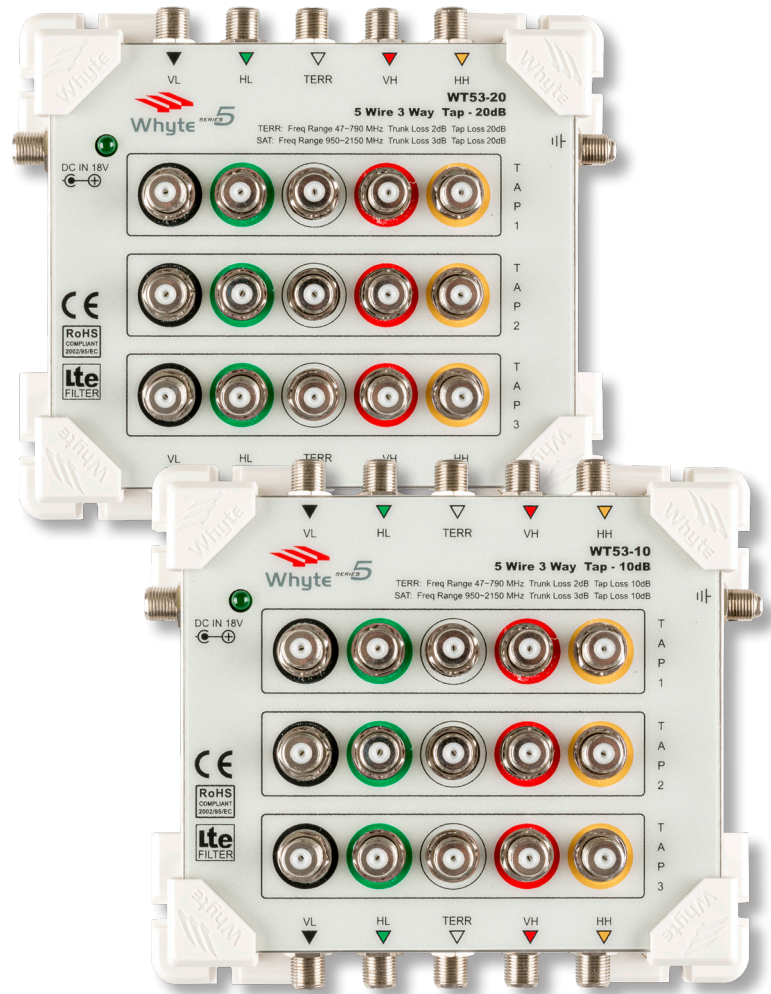

MODEL		WT53-10	WT53-20
Frequency	SAT	950-2150MHz	950-2150MHz
	TERR	87-790MHz	87-790MHz
Inputs (F-Type Connector)		4 SAT + 1 TERR	4 SAT + 1 TERR
Outputs (F-Type Connector)		4x 4 SAT + 4x TERR	4x 4 SAT + 4x TERR
DC Input (Injection of DC applied to)		HL + HH SAT	HL + HH SAT
DC Pass Trunk to Tap	SAT	YES	YES
	TERR	NO	NO
DC Pass Trunk to Trunk	SAT	YES	YES
	TERR	NO	NO
Trunk Through Loss	SAT	2dB±1dB	2dB±1dB
	TERR	2dB±1dB	2dB±1dB
Tap Loss	SAT	10dB	20dB
	TERR	10dB	20dB
Fixed Slope Taps (SAT)		4dB	4dB
Isolation		>30dB	>30dB
Max Current Pass (Trunk/Trunk/Trunk/Tap)		2A	2A
Power Indication		LED	LED
Dimensions W x L x H (mm)		156 x 136 x 43	156 x 150 x 43
Tap Leads Included		YES - 3 Sets	YES - 3 Sets
Weight		460g	460g