


- 4 Years Warranty
- 8 SAT + 1 TERR Inputs
- 2 x 8 SAT + 1 TERR Outputs
- LTE Filter rejects 4G interference
- 18V Auxiliary Input injects power to the HL & HH trunk lines
- Green LED indicates DC power present
- Compact size
- Colour coded inputs & outputs
- Comes with 9 F-Type couplers for easy connection to all Series 9 products

The Whyte Series 9 Splitter WS92-05 is a passive device designed to be used with the Whyte Series 9 IRS Multiswitch Range.

The WT91-10 10db Tap enables further flexibility for your system design.

The WS92-05 Splitter and WT91-10 Tap comes with 9 F-Type Couplers for quick & easy insertion in to a cascade of Series 9 Multiswitches.

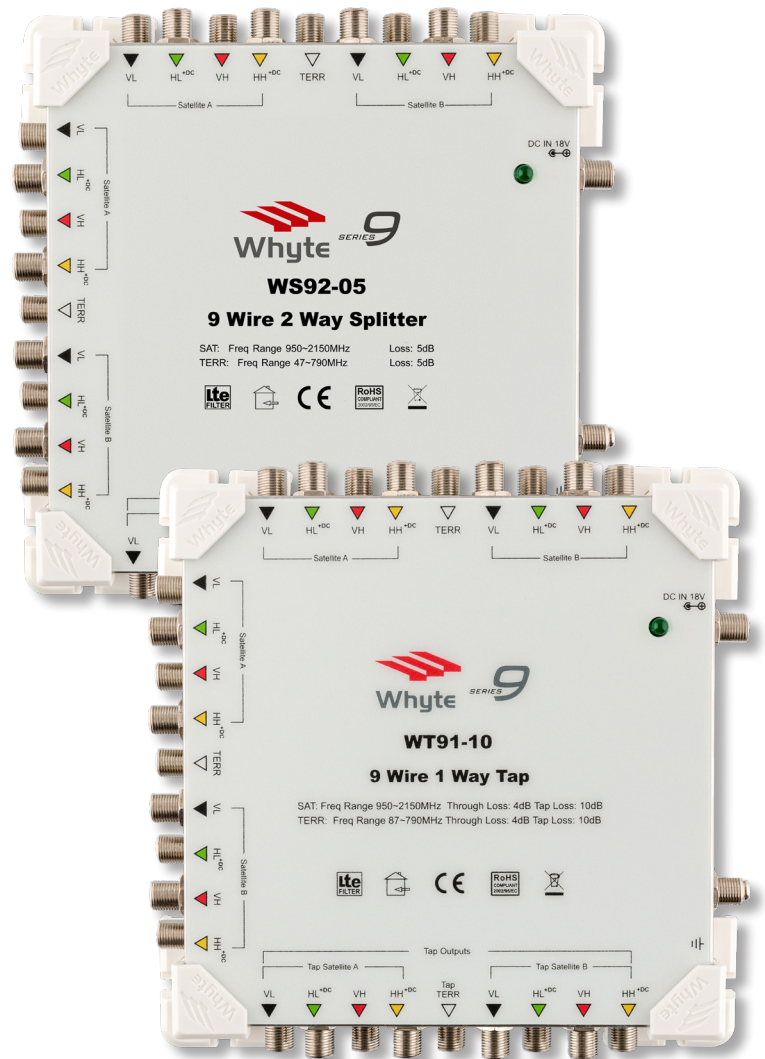

MODEL		WT91-10	WT92-05
Frequency	SAT	950-2150MHz	950-2150MHz
	TERR	87-790MHz	87-790MHz
Inputs (F-Type Connector)		8 SAT + 1 TERR	8 SAT + 1 TERR
Outputs (F-Type Connector)		2x 8 SAT + 2x TERR	2x 8 SAT + 2x TERR
DC Input (Injection of DC applied to)		SAT Trunk HL + HH	SAT Trunk HL + HH
DC Pass Trunk to Tap	SAT	YES	YES
	TERR	NO	NO
DC Pass Trunk to Trunk	SAT	YES	~
	TERR	NO	~
Trunk Through Loss	SAT	2dB±1dB	~
	TERR	2dB±1dB	~
Tap Loss	SAT	10dB	4dB±1dB
	TERR	10dB	4dB±1dB
Fixed Slope Tap (SAT)		4dB	4dB
Isolation		>30dB	>30db
Max Current Pass (Trunk/Trunk/Tap)		2A	2A
Power Indication		LED	LED
Dimensions W x L x H (mm)		175 x 175 x 43	175 x 175 x 43
Weight		514g	600g