



## Specifications




### Qi65CB Speaker

6.5" Professional In-Ceiling  
Background Speaker








### Qi65 Speaker

6.5" Professional  
In-Ceiling Speaker




### Qi65 ST Speaker

6.5" Professional In-  
Ceiling Stereo Speaker


<b>Tweeter</b>	Sympathetic Radiator	Swivel	Fixed
<b>Tweeter diameter</b>	2.2" (55mm)	0.75" (19mm)	0.75" (19mm)
<b>Woofers diameter</b>	6.5"	6.5"	6.5"
<b>Cutout Size mm</b>	203mm	203	203
<b>Power handling (program)</b>	10-50W	15-60W	15-60W
<b>Impedance (nominal) ohms</b>	8ohm	8ohm	8ohm
<b>Sensitivity</b>	93dB	89dB	86dB
<b>Response(Low freq.) -3dB</b>	77Hz	75Hz	75Hz
<b>Maximum rear depth mm</b>	73	79	84
<b>Size(Round grilles)</b>	232	232	232
<b>Grille / Stock Codes</b>	 Circular Grille QI1105 (Pack of 10)	 Circular Grille QI1110 (Pair)   Square Grille QI1120 (Pair)	 Circular Grille QI1150 (Single)   Square Grille QI1160 (Pair)

## Additional Information




### Qi80 Speaker

8" Professional In-Ceiling Speaker




### Qi65CP Speaker

6.5" Performance In-Ceiling Speaker



### Qi65CP ST Speaker

6.5" Performance In-Ceiling Speaker



### Qi80CP Speaker

8" Performance In-Ceiling Speaker

Swivel

0.75" (19mm)

8"

281

15-60W

8ohm

88dB

63Hz

87

248

Swivel

1" (25mm)

6.5"

203

15-80W

8ohm

90dB

70Hz

79

232

Fixed

2 x 1" (25mm)

6.5"

203

15-60W

8ohm

87dB

70Hz

84

232

Swivel

1" (25mm)

8"

281

15-80W

8ohm

88dB

55Hz

97

248



Circular Grille  
QI1208 (Pair)



Circular Grille  
QI1130 (Single)



Circular Grille  
QI1170 (Single)



Circular Grille  
QI1210 (Single)




Square Grille  
QI1140 (Single)




Square Grille  
QI1180 (Single)


## Specifications






**Qi50CW Speaker**  
5.25" Multi-Purpose In-Ceiling Speakers



**Qi65CW Speaker**  
6.5" Weatherproof Speaker



**Qi65CW ST Stereo Speaker**  
6.5" Weatherproof Stereo Speaker

<b>Tweeter</b>	Fixed	Fixed	Fixed
<b>Tweeter diameter</b>	0.75" (19mm)	1" (25mm)	2 x 0.5" (13mm)
<b>Woofer diameter</b>	5.25"	6.5"	6.5"
<b>Cutout Size mm</b>	203	203	197
<b>Power handling (program)</b>	15-60W	15-60W	15-60W
<b>Impedance (nominal) ohms</b>	8ohm	8ohm (Switchable HF)	8ohm (Switchable HF)
<b>Sensitivity</b>	87dB	87dB	85db
<b>Response(Low freq.) -3dB</b>	75Hz	65Hz	65Hz
<b>Frequency Response</b>	-	-	-
<b>Maximum rear depth mm</b>	79	84	84
<b>Size(Round grilles)</b>	204	230	230
<b>Grille / Stock Codes</b>	 Circular Grille QI1050 (Pair)	 Circular Grille QI1190 (Pair)	 Circular Grille QI1200 (Single)

### Additional Information




### Qi45EW Speaker

4.5" Weatherproof  
On-Wall Speaker



### Qi65EW Speaker

6.5" Weatherproof  
On-Wall Speaker



### Qi65LW Speaker

6.5" Weatherproof  
On-Ground Speaker

-

-

-

0.5" (12.5mm)

1" AL dome (25mm)

1" PEI dome (25mm)

4.5"

6.5"

6.5"

203

203

203

10-50W

15-80W

10-60W

8ohm

8ohm

8ohm

86dB

87dB

88dB

85Hz

80Hz

55Hz

80Hz-20kHz

80Hz-20kHz

70Hz-20kHz

-

-

-

245 x 170 x 135

325 x 225 x 180

-



Black  
QI3130 (Single)



Black  
QI3170 (Single)

QI3210 (Single)




White  
QI3150 (Single)




White  
QI3190(Single)


## Specifications



**Qi65RP Speaker**  
6.5" In-Wall Speaker




**Qi80RP Speaker**  
8" In-Wall Speaker



**QiSUB80SP**  
**Subwoofer**  
8" In-Wall / In-ceiling

<b>Tweeter</b>	Swivel	Swivel	-
<b>Tweeter diameter</b>	1" (25mm)	1" (25mm)	-
<b>Woofer diameter</b>	6.5"	8"	8"
<b>Cutout Size mm</b>	275 x 187	335 x 233	248
<b>Recommended Power</b>	30-120W	30-160W	50-100W
<b>Impedance (nominal) ohms</b>	8ohm	8ohm	8ohm
<b>Sensitivity</b>	85dB (switchable HF)	88db (switchable HF)	88dB (switchable HF)
<b>Response(Low freq.) -3dB</b>	65Hz	60Hz	50Hz
<b>Frequency Response</b>	-	-	-
<b>Maximum rear depth mm</b>	79	95	99
<b>Size(Round grilles)</b>	306 mm x 219	365 x 263	287 x 287
<b>Grille / Stock Codes</b>	 Rectangular Grille QI2110 (Single)	 Rectangular Grille QI2210 (Single)	 Square Grille QI2250 (Single)

## Additional Information

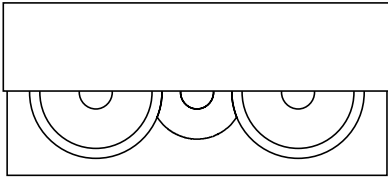

## Qi65LCR Speaker

6.5" In-Wall LCR Speaker

Swivel

1" (25mm)

2 x 6.5"

483 x 193

30-160W

8ohm

87dB (switchable HF)

65Hz


-

85

511 x 221



Rectangular Grille  
QI2150 (Single)



## Fire & Acoustic Hoods

-

**Woven Glass Fabric**

0.40mm

**Thickness**

430 g/m<sup>2</sup>

**Weight/m<sup>2</sup>**

1360 d'tex

**Warp count**

Starch weave lock

**Finish**

10-600 kg/m<sup>3</sup>

**Specific gravity**

Between 315°C to 370°C

**Flash ignition point**

28 000 KJ/kg

**Thermal energy**

Complies with Part B and Part E UK building regulations

**Test Details**

-

**Grille / Stock Codes**

QI 50CF Fire & Acoustics Hoods -  
for QI50 & IC125 models  
QI9150 (Single)

QI 65CF Fire & Acoustics Hoods -  
for QI65 & IC165 models  
QI9160 (Single)

QI 80CF Fire & Acoustics Hoods -  
for QI80 models  
QI9180 (Single)

QI 65RF Fire & Acoustics Hoods -  
for QI65R models  
QI9260 (Single)

QI 80RF Fire & Acoustics Hoods -  
for QI 80R models  
QI9280 (Single)

QI 65LCRF Fire & Acoustics Hoods -  
for QI 80LCR models  
QI9290 (Single)