


Specification Data Sheet

Rev 1.0


Armour Home Electronics R&D Department

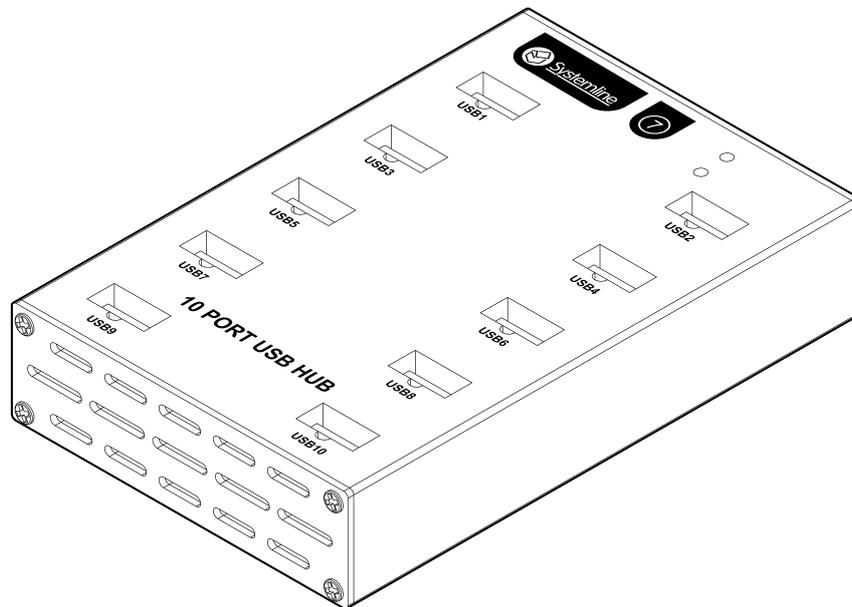


The S7 10 port USB Hub allows you to connect 8 NetAmp zones (4 NetAmps) into one USB socket from the server. Up to three USB hubs can be used on a single server (24 zone version) to connect 12 NetAmps giving 24 zones. Each hub has a power supply to ensure the very best USB performance in managing audio to 8 connected zones. Each USB socket has a blue LED indicating a good connection. It is made of strong but light weight metal, sprayed black to compliment the NetAmp, and can easily be attached to a vertical surface if needed.

Connectivity		
USB B from server	x 1	
USB A to NetAmps	x 10, max 8 recommended	
DC Power	DC Power jack	12V
Other		
USB Status	Blue LED on confirmed connection	
Power status	Red when on	
Power switch	On/Off	
General		
Dimensions	W: 80mm H:25mm D:125mm	
Net Weight	63g	


FRONT

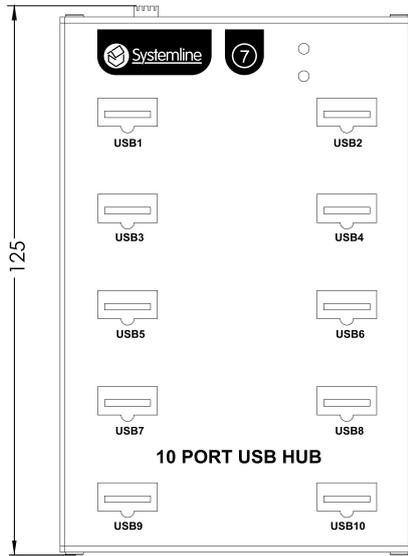


SIDE

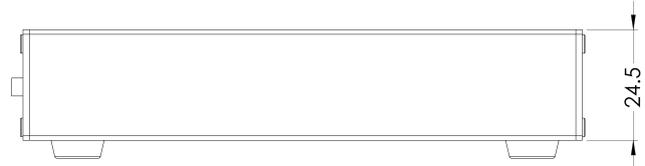

BOTTOM

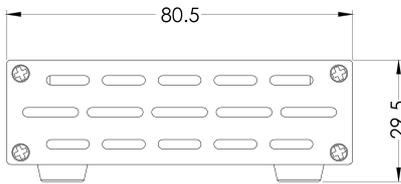

TOP

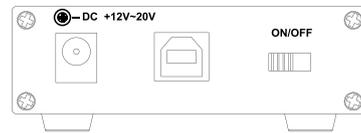

*All measurements in mm