




Specification Data Sheet

Rev 1.0 July 2018

Armour Home Electronics R&D Department

NetConnect is an all-in-one network music amplifier controlled by the Systemline 7 app. NetConnect can be installed in a zone, connected to a pair of speakers of choice, a local power supply and an ethernet connection (obtained from a dedicated cable or powerline adaptor). Multiple NetConnects can be used as a standalone Systemline 7 system, one being configured as the 'master'. It is a reliable, simple to install solution that can be deployed in many ways, and its Hi-Res audio capability ensures the very best sound quality. NetConnect can also be used with an S7 NetServer as part of a standard S7 system. Most streaming services are supported with the added ability to play music back from a USB drive and one-touch control from the powerful S7 app.

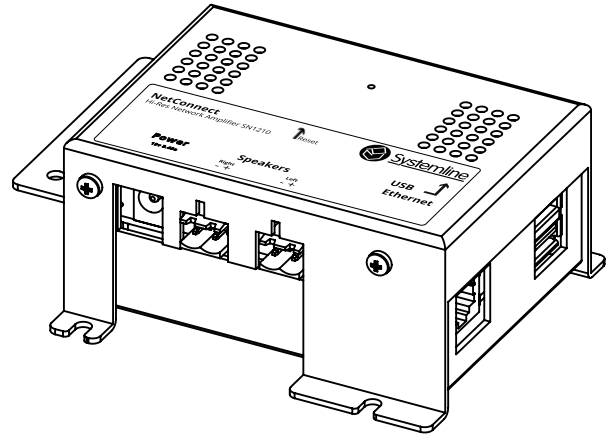

Features		
Audio	>192kHz/24bit	Network (Gigabit recommended)
Favourites/Pre-sets	Changeable in the S7 app	
Control options	TCP/IP, S7 App	

Voltage		
Standby consumption	<0.5W	
Mains voltage	19v – 3.43A	External Power supply

Audio		
Power	35W	4 ohms
Total Harmonic Distortion	<0.1%	@ 1000Hz
Noise	-80dBV	A weighted
Frequency response	20Hz-20kHz ±1dB, -3dB @ 45kHz	@ 96kHz

Connections		
Inputs	Network (RJ45)	
Outputs	2x Speaker L&R (IMO)	
Control	TCP/IP via Network or S7App	
USB (Format - FAT32)	x2 (only one at a time)	1.2A


General		
Dimensions	46x114x85mm (HxWxD)	
Net Weight	0.5kg	




Systemline

SN1210 S7 NetConnect Hi-Res Zone Amplifier


FRONT

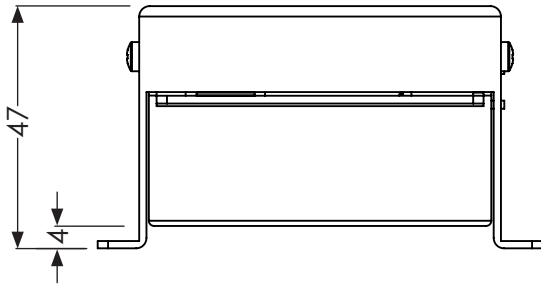


SIDE

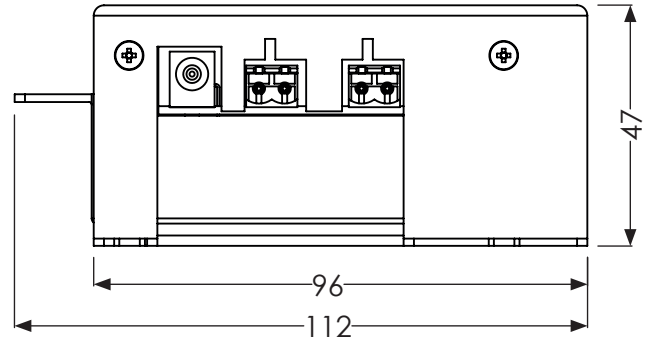

TOP

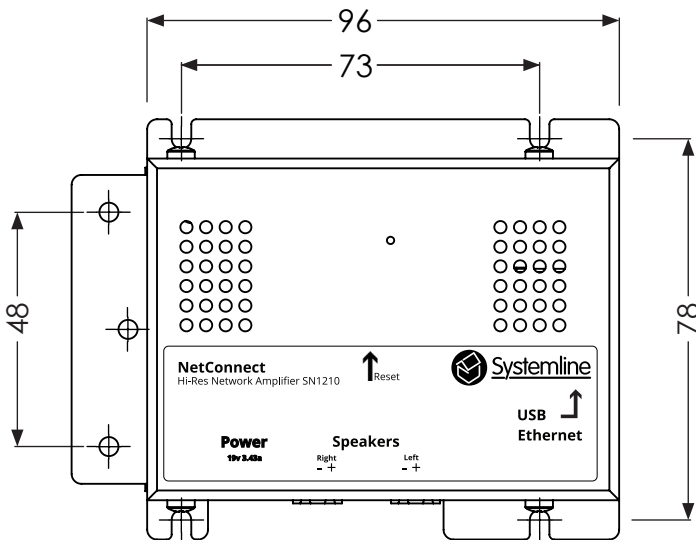

REAR

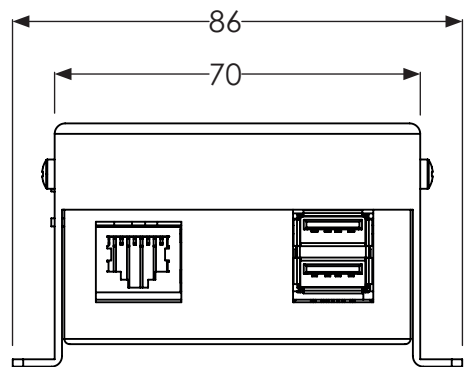

*All measurements in mm



armourHOME

Stortford Hall Industrial Park,
Dunmow Road, Bishops Stortford
Hertfordshire, CM23 5GZ, UK

t: +44 (0)1279 501111
f: +44 (0)1279 501080
info@armourhe.co.uk

www.systemline.co.uk

Q16782-AR_r12